


SDS263T SIKA Flow Sensor Spare Kit




Wiring Connections of SIKA sensor for Electric and Mixer Showers

Wiring to the transformer:

- Remove the hatch on the transformer to expose connector blocks.
- Connect the sensor wires to the terminal block as shown below.
- Gently tug on the SIKA sensor wires to ensure that there is a secure connection.
- Set the blue jumper for SIKA sensor (Position 2).
- For Electric shower with 15mm pipework to the pump, select position 1 for the Red jumper.
- For mixer showers with 22mm pipework, select position 2 for the Red jumper.
- Adjust the pump Overrun to 10, 30 or 60 seconds as marked with the White jumper.
- Refit and tighten the screw of the transformer.

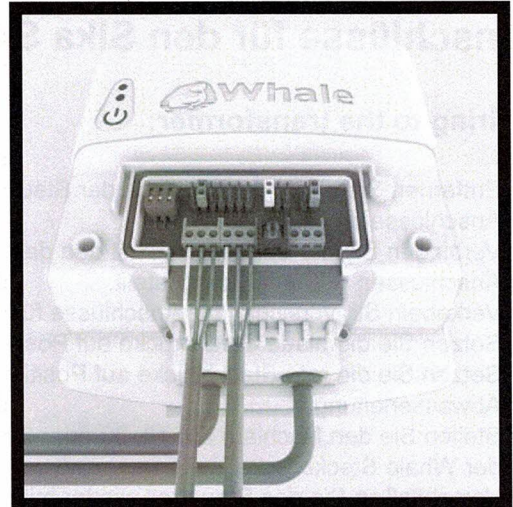

Wiring Connections for Smoothflow and Dry-Deck

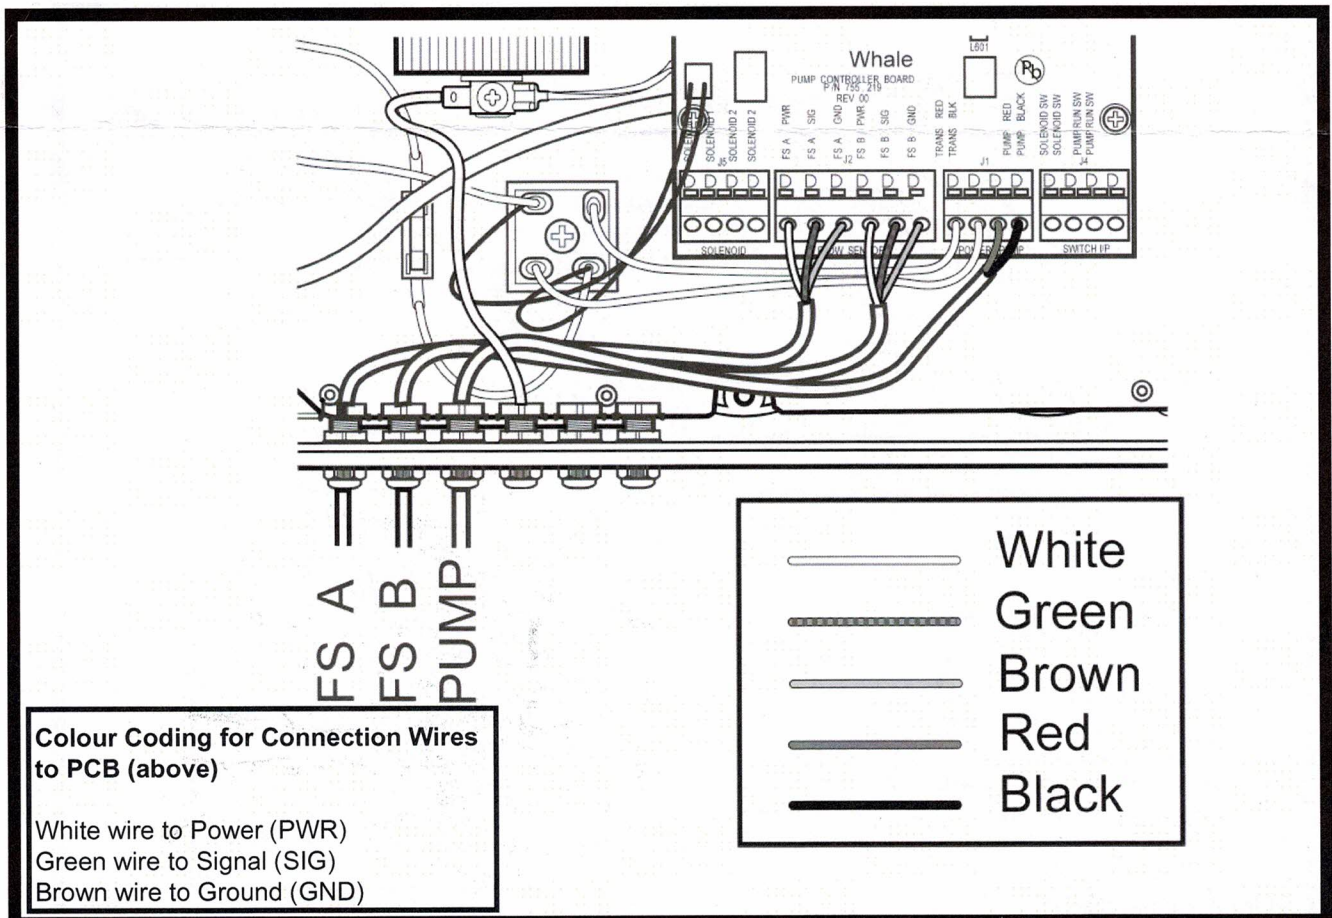

T: 0845 0694 253

E: drainagesupport@whalepumps.com

W: www.whalepumps.com

©Copyright Whale 2017 - All rights reserved. Reproduction in whole or in part without permission is prohibited. WHALE®, is a registered trademark of Munster Simms Engineering Limited, Bangor, Northern Ireland trading as Whale. Whale's policy is one of continuous improvement and we reserve the right to change specifications without prior notice. Illustrations are for guidance purposes only. Neither the accuracy nor completeness of the information contained in any product brochure is guaranteed by the Company and may be subject to change at its sole discretion. Please note that by contacting Whale Support you will be indicating your consent to receiving product updates, recall information, help guides and appropriate marketing messages from us via post, email or telephone unless you indicated an objection to receiving such messages.