

## Product Overview

Offering a safe showering experience, the Onyx Combo Mixer Shower features a TMV2-approved mixer valve which is cool to touch and easily operated using two paddle levers.

The Onyx Combo also cleverly incorporates two weight-loading grab rails into the L-shaped design, these extend from the valve with a vertical riser and horizontal grab rail able to support users of up to 23.5st (150kg).

For greater flexibility, the Onyx Combo is available in left and right-handed configurations.

## Features & Benefits

- + TMV2-approved mixer valve offers thermostatic protection, providing peace of mind.
- + Mixer valve is cool to touch when in use to prevent scalding.
- + Individual lever paddles control temperature and flow, with icons on the valve to confirm selection.
- + Vertical riser and horizontal grab rails can support users of up to 23.5st (150kg).
- + Multifunctional shower head offers 3 spray modes and features durable silicone nozzles which are easy to clean.
- + 2m long shower hose enables manoeuvrability when showering independently, or with assistance.
- + Riser rail features adjustable holder for shower head to accommodate different user heights.
- + Contemporary design with polished chrome finish, which complements the AKW Onyx collection of grab rails, shower seats, trays, and accessories.
- + Available in left or right-handed configurations.
- + Supplied with interchangeable mixer valve paddles in white and black.



## Guarantee & Approvals

- + 3 Year warranty
- + TMV2 and WRAS approved



## Technical & Installation Details

### Includes:

- + Mixer shower valve with interchangeable white and black paddles
- + Load-bearing vertical riser rail
- + Load-bearing horizontal grab rail
- + Clear soap dish
- + Sliding shower head bracket
- + 3 spray mode shower head
- + 2m shower hose
- + Additional shower head holder

### Technical Specification

- + Fixing points per wall flange: 3
- + Wall flanges: 5
- + Fixing points for additional shower head holder: 2
- + Dynamic pressure: 0.5-5 bar
- + Static pressure: 1-10 bar
- + Inlet fitting: ½" BSP
- + Outlet fitting: ½" BSP
- + Inlet cold temperature range: 4-25°C
- + Inlet hot temperature range: 55-65°C
- + Temperature range: 16-49°C
- + Safety setting: 38°C limited high temperature, override button can achieve up to 49°C (+/-2°C)
- + Approx. flow rate: 8.5 l/min (3 bar)



### Tube Diameter

- + Horizontal: 42mm
- + Vertical: 32mm

### Wall Clearance

- + Horizontal rail: 56mm
- + Vertical rail: 61mm

### Maximum Weight Load

- + Horizontal rail: 23.5st (150kg)
- + Vertical rail: 23.5st (150kg)

**Product Codes**


Onyx Combo Mixer Shower LH

25436L-LS

Onyx Combo Mixer Shower RH

25436R-LS

**Dimensions (mm)**

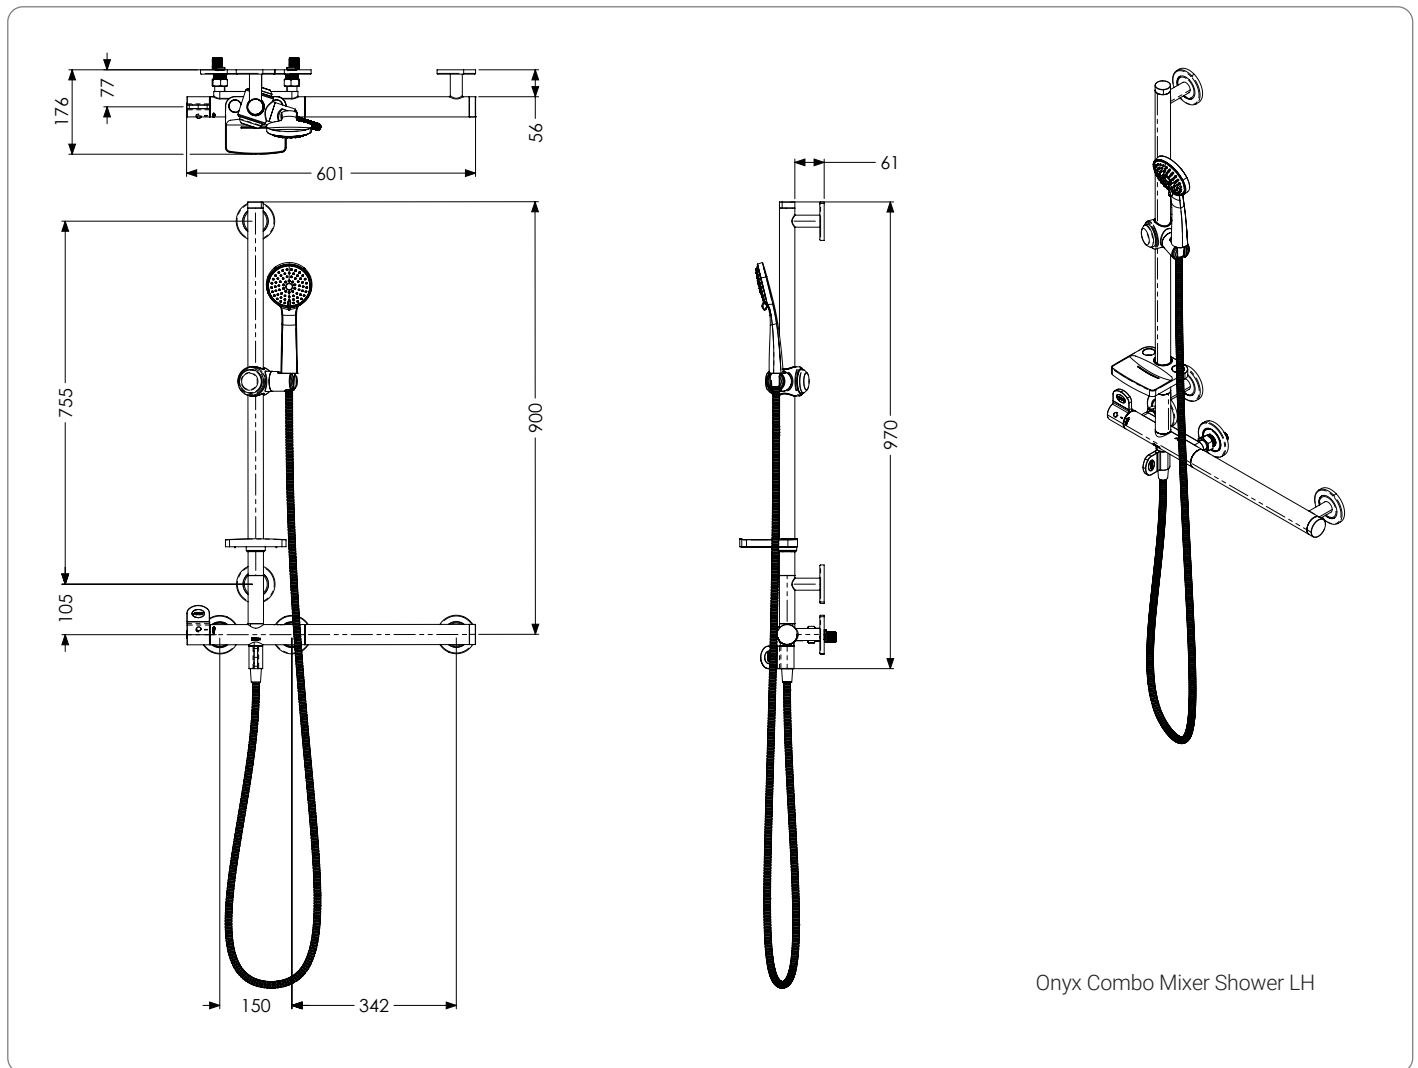

**Dimensions (mm)**

