

LivInc - Semi Pro 2 Part


Matt Black & Brushed Nickel

abode

Product Basics: Nb. Model shown may not be displayed in the finish as described

Image: 	Abode code:	AT2213
	EAN 13 Barcode:	5060879995390
	Specification version:	0 10/10/2024
	Finish:	Painted


Product Drawing:

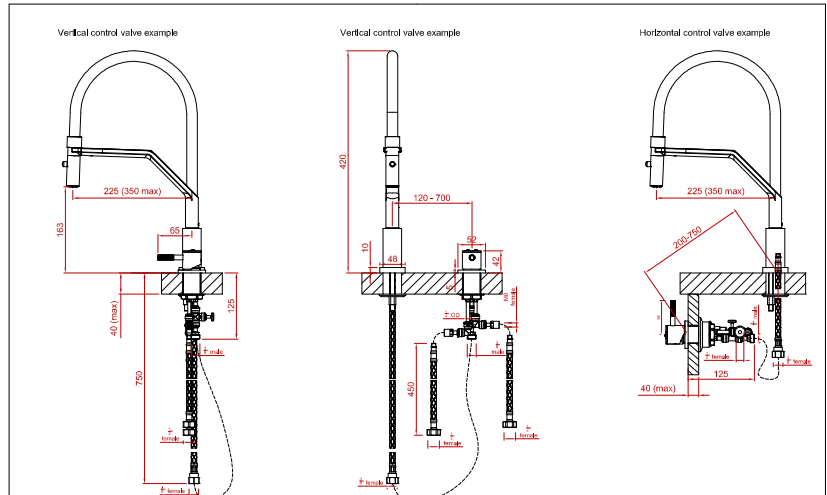 <p>LivInc Semi Pro 2 Part</p> <p>abode</p>	Overall Product Length mm (typically left to right dimension of product)	200
	Overall Product Width mm (typically from the rear of the base plinth to the end of the spout)	271
	Overall Product Height mm (typically from base of tap to top of spout)	420
	Spout Exit Height mm (typically from the base of the tap to the underside of the aerator)	163
	Spout Exit Height Maximum mm (typically from the base of the tap to the underside of the aerator, only applicable to taps with moving spouts)	
	Spout Exit Reach mm (typically from the centreline of the tap hole to the centre of the aerator)	225
	Spout Exit Reach At Maximum mm (typically from the centreline of the tap hole to the centre of the aerator, only applicable to taps with moving spouts)	350
	Base Diameter mm (typically the diameter of the base plinth or the size of the wall plate)	52
	Handle Back Projection mm (typically the distance from the centre of the taphole to the furthest point backwards of the lever when rotated)	
	Tap Hole or Mounting Holes Size mm (min. & max. mounting hole size)	35
	Tap Hole Centre Spacing mm (recommended distance between tap holes)	120-750
	Fixing range (min - max surface fixing depth)	0 - 40
	Recommended Hole size (wall mounted products only)	

Packing summary: <ul style="list-style-type: none"> Packaging Type: Boxed Packaged size L x W x D: 570 x 355 x 75 mm Boxed weight: 3.27 kg 	Materials & workmanship warranty summary: <ul style="list-style-type: none"> Materials & workmanship 5 years. Valves & working parts 5 year. Decorative finish 1 year. O-rings 1 year. 	Care instructions summary: <ul style="list-style-type: none"> Clean the mixers and showers regularly as required, using soap, do not use any other cleaners. Regular cleaning will prevent the build-up of lime scale and dirt. After cleaning rinse thoroughly with clean water to remove any cleaner residue. Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives, for more detail see supplied booklet or www.abodedesigns.co.uk
--	---	---

Features:							
Delivers filtered water?	Delivers filtered 98°C water?	Has a spray function?	Has a Pull around (semi pro) function?	Product is flow limited?	Product is DDA compliant?	Total number of exits (shower controls only)	Total number of independent exits (shower controls only)
		true	true	true	true		

Flow information:	
Min. cold water pressure (bar)	2
Min. hot water pressure (bar)	2
Max. water pressure (bar)	5.5
Max. flow at 3 bar (L/m)	4.77
Bath & Shower mixer only - Min. hot/cold water pressure (Bath)	
Bath & Shower mixer only - Min. hot/cold water pressure (Shower)	
General notes on pressures / flow:	
minimum pressure 1.7 bar with flow limiter removed	

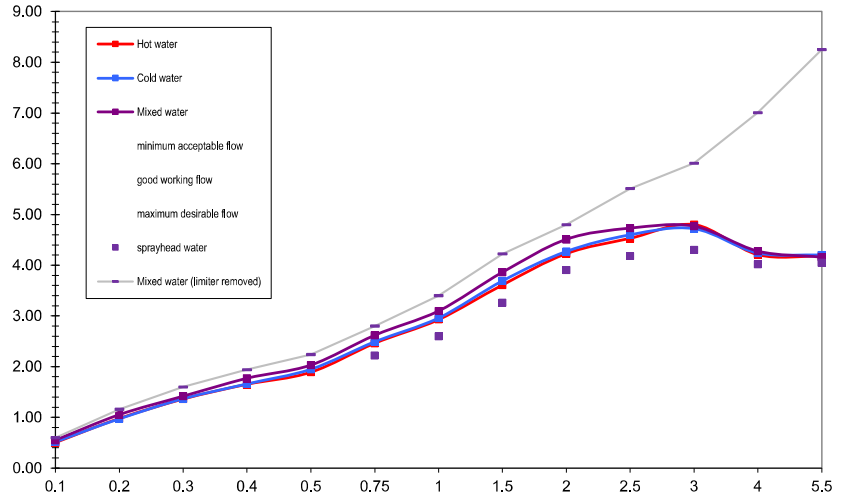

Flow Limiter:		
Max. Design Flow limit	Flow limiter (USG/LPM)	Flow limiter Type
5	L/M	combined check valve & flow limiter (CV-FR)

Inlet hoses:						
Function	Type	Outlet connection Type (supply out)	Inlet Connection Type (supply in)	Overall Length (mm)	Check Valve Included?	Other Info
hot water inlet	Flexible stainless braided hose	M8	1/2" BSP Female	450	no	1 x 90 degree 1/4" John Guest elbow, 2 x JG 1/4" pushfit locking clips
cold water inlet	Flexible stainless braided hose	M8	1/2" BSP Female	450	no	1 x 90 degree 1/4" John Guest elbow, 2 x JG 1/4" pushfit locking clips

Spout:		
Flow characteristics	Spout Rotation Range (°)	Spout End Connection (spout end threading)
single flow	0-120 degrees limited	m22 x 1 male

Other information:	
Filter Type	Filter Reorder Code