


Geberit AquaClean Tuma Comfort WC complete solution, floor-standing WC, back-to-wall



Example image

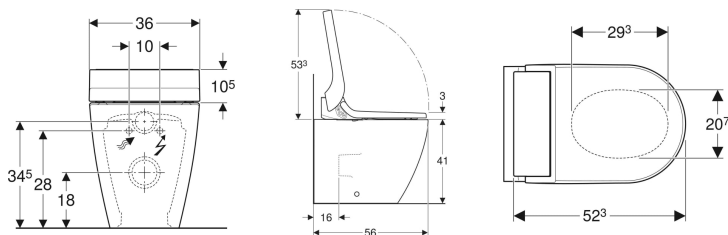

Application purposes

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water

Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Separate Lady shower nozzle in protected park position
- Continuous flow heater can be deactivated
- Spray arm with nozzle can be extended for anal and vaginal area
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Rimless WC ceramic appliance
- Washdown WC with special glaze KeraTect
- User detection
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Dryer can be activated
- WC seat ring with rapid heating function
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- Functions and settings via remote control
- Four user profiles can be programmed
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic

- Floor inlets of 6–28 cm from wall in combination with Geberit Monolith sanitary modules for floor-standing WC possible
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077
- Compatible with Geberit Home App
- Shower water temperature can be adjusted via Geberit Home App
- Dryer temperature can be adjusted via Geberit Home App
- Temperature of the WC seat heating can be adjusted via Geberit Home App
- Can be combined with Geberit Monolith sanitary module for floor-standing WC

Technical data

| | |
|--|------------|
| Protection degree | IPX4 |
| Protection class | I |
| Nominal voltage | 230 V AC |
| Mains frequency | 50 Hz |
| Power consumption | 2000 W |
| Power consumption standby | ≤ 0.5 W |
| Flow pressure | 0.5-10 bar |
| Operating temperature | 5–40 °C |
| Water temperature, adjustment range | 34–40 °C |
| Water temperature, factory setting | 37 °C |
| Calculated flow rate | 0.02 l/s |
| Minimum flow pressure for calculated flow rate | 0.5 bar |
| Spray time | 50 s |
| Maximum load WC seat | 150 kg |

Scope of delivery

- Water supply connection set
- Female socket for mains connection
- Sound insulation set
- Spray shield
- Compensation pad for WC seat / ceramic appliance
- Descaling agent, 125 ml
- Cleaning set
- Connection set for WC, ø 90 mm
- Remote control with wall-mounted case and battery CR2032
- Fastening material

| Art. no. | Colour / surface |
|--------------|---|
| 146.310.SI.1 | WC ceramic appliance: white / KeraTect Design cover: white glass |
| 146.310.11.1 | WC ceramic appliance: white / KeraTect Design cover: white |
| 146.310.SJ.1 | WC ceramic appliance: white / KeraTect Design cover: black glass |
| 146.310.FW.1 | WC ceramic appliance: white / KeraTect Design cover: brushed stainless steel |

Accessories

- Wall-mounted control panel for Geberit AquaClean
- Wall-mounted control panel, touchless, for Geberit AquaClean
- Geberit P-bend set for floor-standing WC
- Geberit connection set for floor-standing WC



-
- This product is supplied with the Geberit AquaClean descaling agent and the Geberit AquaClean cleaning agent. These consumables contain classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found in the appendix or at www.geberit.com.