


## Geberit AquaClean Tuma Classic WC complete solution, floor-standing WC, back-to-wall



Example image

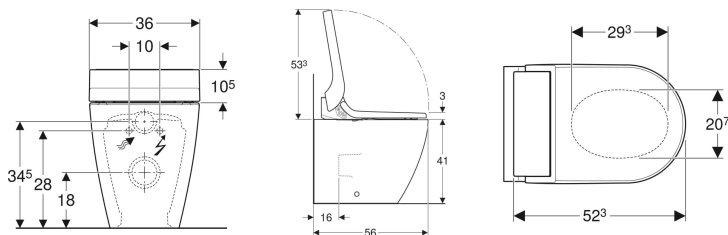

### Application purposes

- For gently cleaning the anal area with water
- For convenient toilet use

### Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Spray arm with nozzle can be extended for anal area
- Spray intensity can be set to five different levels
- Oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Rimless WC ceramic appliance
- Washdown WC with special glaze KeraTect
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077
- Compatible with Geberit Home App
- Shower water temperature can be adjusted via Geberit Home App
- Continuous flow heater can be deactivated via Geberit Home App
- Spray arm can be set to five different positions via Geberit Home App

- Floor inlets of 6–28 cm from wall in combination with Geberit Monolith sanitary modules for floor-standing WC possible
- Can be combined with Geberit Monolith sanitary module for floor-standing WC

### Technical data

Protection degree	IPX4
Protection class	I
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption	2000 W
Power consumption standby	≤ 0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Water temperature, factory setting	37 °C
Calculated flow rate	0.02 l/s
Minimum flow pressure for calculated flow rate	0.5 bar
Spray time	50 s
Maximum load WC seat	150 kg

### Scope of delivery

- Water supply connection set
- Female socket for mains connection
- Sound insulation set
- Compensation pad for WC seat / ceramic appliance
- Descaling agent, 125 ml
- Spray shield
- Connection set for WC, ø 90 mm
- Fastening material

Art. no.	Colour / surface
146.320.11.1	WC ceramic appliance: white / KeraTect Design cover: white

### Accessories

- Geberit P-bend set for floor-standing WC
- Geberit connection set for floor-standing WC



- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found in the appendix or at [www.geberit.com](http://www.geberit.com).