


Geberit AquaClean Mera Comfort WC complete solution, wall-hung WC



Example image

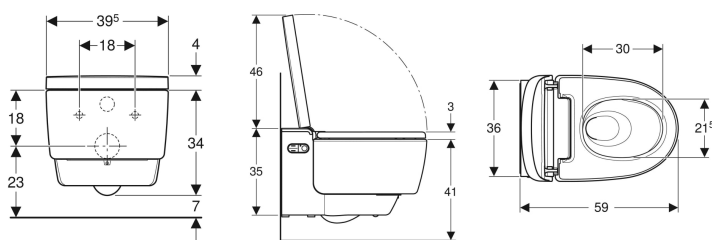

Application purposes

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water

Characteristics

- Hybrid hot water system with continuous flow heater and storage water heater
- Anal shower with double-nozzle WhirlSpray shower technology
- Separate Lady shower nozzle in protected park position
- Adjustable shower water temperature
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Washdown WC with special glaze KeraTect
- User detection
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Dryer can be activated
- Dryer air intensity can be set to 5 positions
- Dryer arm can be extended
- Adjustable dryer temperature
- WC seat ring with rapid heating function
- Adjustable temperature of the WC-seat heating
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- Touchless opening and closing of the WC lid
- Activation of the orientation light when approaching

- Orientation light can be set in seven colours
- Functions and settings via remote control
- Four user profiles can be programmed
- Compatible with Geberit Home App
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- External water supply connection on the left possible with accessories
- External mains connection with power outlet on the right possible
- Premounted sound insulation
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

Technical data

| | |
|--|------------|
| Protection degree | IPX4 |
| Protection class | I |
| Nominal voltage | 230 V AC |
| Mains frequency | 50 Hz |
| Power consumption | 2000 W |
| Power consumption standby | ≤ 0.5 W |
| Flow pressure | 0.5-10 bar |
| Operating temperature | 5–40 °C |
| Water temperature, adjustment range | 34–40 °C |
| Calculated flow rate | 0.03 l/s |
| Minimum flow pressure for calculated flow rate | 0.5 bar |
| Spray time | 30-50 s |
| Maximum load WC seat | 150 kg |

Scope of delivery

- Water supply connection set for Sigma and Omega concealed cisterns 12 cm, installation height 112 cm
- Female socket for mains connection
- Spray shield
- Descaling agent, 125 ml
- Cleaning set
- Connection set for WC, ø 90 mm
- Remote control with wall-mounted case and battery CR2032
- Fastening material

| Art. no. | Colour / surface |
|--------------|---|
| 146.210.11.1 | WC ceramic appliance: white / KeraTect Design cover: white |
| 146.210.21.1 | WC ceramic appliance: white / KeraTect Design cover: gloss chrome-plated |

Accessories

- Wall-mounted control panel for Geberit AquaClean
- Interface module 12 V for Geberit AquaClean Mera/Sela
- Wall-mounted control panel, touchless, for Geberit AquaClean

- Interface module 4.1 V for Geberit AquaClean Mera / Sela



-
- This product is supplied with the Geberit AquaClean descaling agent and the Geberit AquaClean cleaning agent. These consumables contain classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found in the appendix or at www.geberit.com.