


## Geberit Monolith Plus sanitary module for wall-hung WC, 101 cm, stoneware front cladding

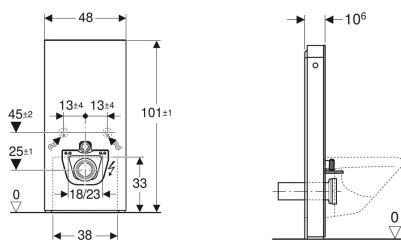

Example image

### Application purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height > 23 cm
- For replacing low-level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For Geberit AquaClean WC complete solutions
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls
- For compensating the offset between WC connections and wall drains using a stepped straight connector for wall-hung WCs

### Characteristics

- Dual flush
- Soft-touch buttons for flush actuation
- Settings can only be changed with the Geberit Home App
- User detection range can be set
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Ceramic honeycomb filter for odour neutralisation can be replaced without tools
- Adjustable interval flush
- With ComfortLight
- Lighting mood infinitely adjustable from orientation light to daylight
- Light colour continuously adjustable from warm white to cool white
- DALI-compatible control
- Operation with extra-low voltage, no mains voltage in cistern

### Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM,  $\varnothing$  44 / 55 mm
- Straight connector made of PE-HD,  $\varnothing$  90 mm
- Adaptor socket made of PE-HD,  $\varnothing$  90 / 110 mm
- 2 threaded rods M12

- Mains connection with flexible three-core sheathed cable
- Water supply connection on the bottom
- Water supply connection on the left/right possible with accessories
- Compensation of dimensional tolerances possible
- Height-adjustable up to 7 cm
- Fastening height WC ceramic appliance  $35 \pm 1$  cm
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting

### Technical data

Protection degree	IPX4
Protection class	I
Nominal voltage	100-240 V AC
Mains frequency	50-60 Hz
Operating voltage	12 V DC
Power consumption	15 W
Power consumption standby	$\leq 0.5$ W
Flow pressure	0.1-10 bar
Maximum operating temperature, water	25 °C
Flush volume, factory setting	6 and 3 l
Flush volume large, adjustment range	4-6 l
Flush volume small	3 l
Light colour	2200-4000 K

- Female socket for mains connection
- Power supply unit
- Support frame
- Fastening material
- Base cover
- Fastening material for drywall

Art. no.	Colour / surface	B	H	T	
131.221.JV.7	Front cladding: Stoneware concrete look Side cladding: aluminium	48 cm	101 cm	10.6 cm	New
131.221.00.7	Front cladding: Stoneware slate look Side cladding: black chrome aluminium	48 cm	101 cm	10.6 cm	New

### Accessories

- Geberit straight connector set for wall-hung WC, stepped by 3 cm
- Geberit straight connector set for wall-hung WC, stepped by 5 cm
- Geberit straight connector set for wall-hung WC, stepped by 7 cm
- Conversion set for Geberit AquaClean WC enhancement solutions
- Lateral water supply connection set for Geberit Monolith sanitary module for WC

- Geberit outlet mounting box
- Interface module 12 V for Geberit AquaClean Mera/Sela



- 
- The colour and structure of natural products may vary
  - Sanitary modules with slate look (.00) or concrete look (.JV) are intended exclusively for use with the items under "Can be combined with"