


Geberit AquaClean Tuma Classic WC complete solution, wall-hung WC



Example image

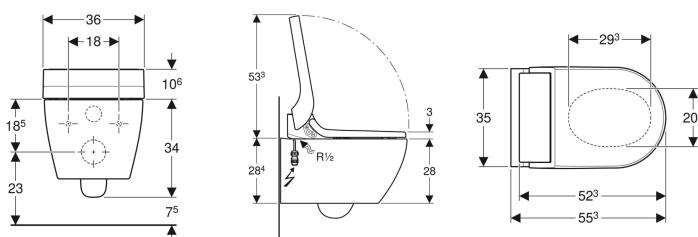

Application purposes

- For gently cleaning the anal area with water
- For convenient toilet use

Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Spray arm with nozzle can be extended for anal area
- Spray intensity can be set to five different levels
- Oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Rimless WC ceramic appliance
- Easy fastening with Easy Fast Fixing (type EFF3)
- Washdown WC with special glaze KeraTect
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077
- Compatible with Geberit Home App

- Shower water temperature can be adjusted via Geberit Home App
- Continuous flow heater can be deactivated via Geberit Home App
- Spray arm can be set to five different positions via Geberit Home App

Technical data

| | |
|--|------------|
| Protection degree | IPX4 |
| Protection class | I |
| Nominal voltage | 230 V AC |
| Mains frequency | 50 Hz |
| Power consumption | 2000 W |
| Power consumption standby | ≤ 0.5 W |
| Flow pressure | 0.5–10 bar |
| Operating temperature | 5–40 °C |
| Water temperature, adjustment range | 34–40 °C |
| Water temperature, factory setting | 37 °C |
| Calculated flow rate | 0.02 l/s |
| Minimum flow pressure for calculated flow rate | 0.5 bar |
| Spray time | 50 s |
| Maximum load WC seat | 150 kg |

Scope of delivery

- Water supply connection set for Sigma and Omega concealed cisterns 12 cm, installation height 112 cm
- Female socket for mains connection
- Sound insulation set
- Spray shield
- Descaling agent, 125 ml
- Connection set for WC, ø 90 mm
- Fastening material
- Compensation pad for WC seat / ceramic appliance

| Art. no. | Colour / surface |
|--------------|---|
| 146.090.11.1 | WC ceramic appliance: white / KeraTect Design cover: white |



- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found in the appendix or at www.geberit.com.