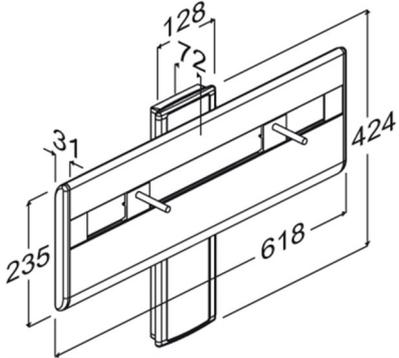




<p>Product Item number</p>	<p>PLUS wash basin bracket with lever control, manually height adjustable R4550112</p>
<p>Colour Product description</p>	<p>VVS:654001110 NRF:6132527 RSK:7972586 EAN:5708590309385 HMI: 71763 NBS:N13:30,335 FDA:ILW/D142473 Anthracite grey</p>  <p>PLUS wash basin brackets are available in electrically, pneumatically and manually height adjustable versions. They are suitable for wall-mounting or for fitting to Pressalit PLUS wall tracks.</p> <p>PLUS wash basin bracket. Manually height adjustable by 240 mm via lever control,. Recommendation: Flexible feed and waste system R2067/R2065. (UK markets R2077/R2075). Anthracite cover plate for vertical wall track. Materials: Aluminium and ABS polymer. Incl. fixing bolts for wash basin. Excl. mounting kit for wall.</p>
<p>Adjustability Adjustment height Product capacity</p>	<p>Height adjustable 240 mm</p> <p>Maximum load: 135 kg. Suitable for wash basins weighing no more than 22 kg. When the wash basin is loaded with 135 kg, each wall fastener will be carrying 57 kg. <i>Wash basin brackets need to be able to carry the weight of the wash basin, as well as support the weight of the person who is leaning against the wash basin or who is using the wash basin to rise from seated position.</i> Neither wash basin nor wash basin bracket are intended to carry the full body weight of a person, and the test methods applicable to wash basin brackets reflect this: ISO 17966 prescribes a static test on the front edge of the wash basin at 75% of maximum user weight, i.e. when the maximum load on a wash basin bracket is given as 135 kg and the wash basin weighs 22 kg, it is – according to ISO 17966 – the equivalent of a user weighing 151 kg leaning on the front edge of the wash basin.</p>















Product Item number	PLUS wash basin bracket with lever control, manually height adjustable R4550112
Materials Ergonomy Features	<p>The wash basin bracket is primarily made of 10-micrometre anodized aluminium. The ends of the bracket cover are capped with ABS polymer.</p> <p>The wash basin bracket suits all types of bolt-mounted wash basin. Its rounded, sleek design greatly facilitates cleaning.</p> <p>If the height of the wash basin only needs to be adjusted occasionally, a manually regulated wash basin bracket could be the best solution. Adjustment involves supporting the weight of the basin and part of the bracket. Where frequent height adjustment is expected, use gas-assisted wash basin bracket R4650 or electrically operated wash basin bracket R475x, instead.</p>
Warranty Cleaning	<p>Pressalit makes a commitment to remedy material and manufacturing defects for a period of five years from the invoicing date.</p> <p>PLUS & SELECT wash basin brackets. The product is to be cleaned with hot water or a mild soapy cleaning agent. Do not use chlorine based, corrosive or abrasive cleaners as it may result in the surface being damaged.</p> <p>The following cleaning agents have been tested by Pressalit and may be used, as long as they are diluted according to the instructions on the container.</p> <p>DISINFECTANTS: Clinimax Difficil-S Erisan OXY+</p> <p>NON-DISINFECTANTS: Suma Star free D1 Taski 100 Taski 200</p> <p>The product must be wiped down with a soft rag wrung out in clear water immediately after cleaning, as some materials may otherwise be discolored and stained, and the surface coating may deteriorate.</p> <p>DECALCIFICATION OF ALUMINUM PARTS: Pressalit recommends that chalky deposits be removed from wall tracks and other aluminum parts using a solution of three parts 30% acetic acid to seven parts tap water. When the aluminum parts have been washed down with this solution, the parts must be wiped over with a damp cloth wrung out in clear water.</p>
Declaration of conformity	This product is in compliance with all relevant requirements of regulation (EU) 2017/745 on medical devices.










Product	PLUS wash basin bracket with lever control, manually height adjustable
Item number	R4550112

Installation in different wall types

	Concrete >B25 V8610 - Mounting kit, 8 coach screws Ø8 x 70, plugs SX10. To be ordered separately.	
	Solid Brick >= Mz12 V8610 - Mounting kit, 8 coach screws Ø8 x 70, plugs SX10. To be ordered separately.	
	Solid Sand Lime Brick >= Hlz12 V8610 - Mounting kit, 8 coach screws Ø8 x 70, plugs SX10. To be ordered separately.	
	Aerated Concrete P4 V8660 - Mounting kit, 8 countersunk bolts M8 x 35, plugs FTP M 8. To be ordered separately.	
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood V8610 - Mounting kit, 8 coach screws Ø8 x 70, plugs SX10. NB! Plugs are not needed. To be ordered separately.	





Product Item number	PLUS wash basin bracket with lever control, manually height adjustable R4550112			
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood Wall fasteners (8 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar.			
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (2 mm) Wall fasteners (8 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar.			
	Drywall (2 x 12,5 mm) water-resistant Wall fasteners (8 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar.	