



Additional Information

“Unique” thermostatic & time flow control combined in one unit

Anti-scald failsafe technology

WRAS & TMV3 approved

Timed flow control automatically closes the tap


Temperature adjustable

Product

NC250CP - Thermostatic timed flow non-concussive basin mounted mixer tap with temperature adjustment

Technical Specification

Max Inlet Pressure (static):	5 Bar
Min Inlet Pressure (dynamic):	1 Bar
Max Inlet Temperature:	65°C
Factory Pre-set Temperature:	41°C with max temp stop
Temperature Stability:	+/-2°C
Timed Flow at 1 Bar:	15±5 Seconds
Max Unbalanced Pressure Ratio:	5:1
Min temperature differential between hot inlet & mixed outlet to achieve cold water failsafe:	10°C

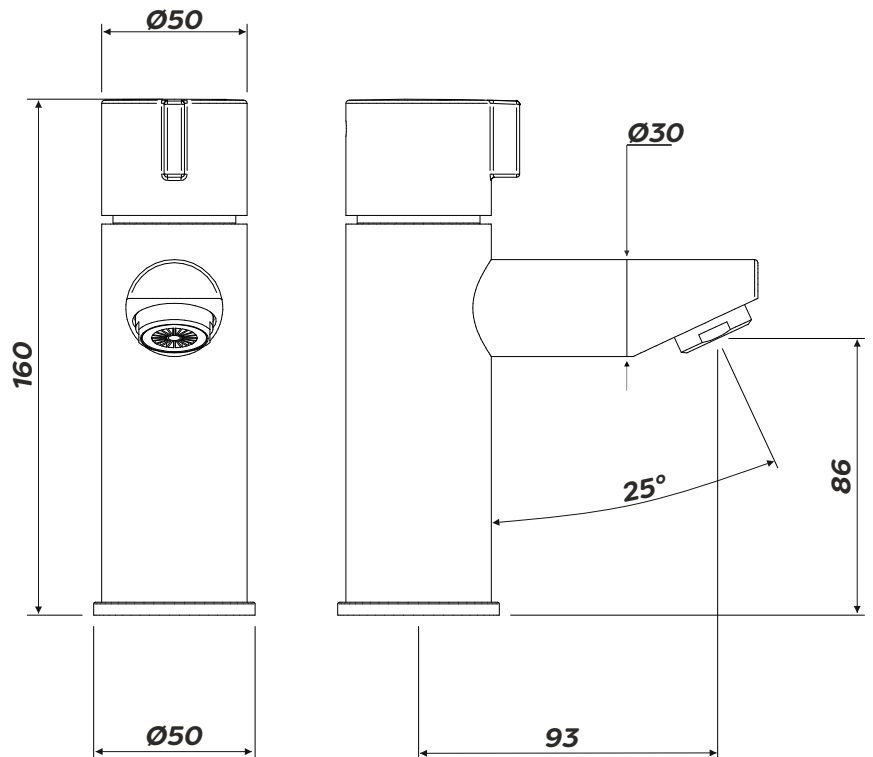

Scan for Spares
Sheet



Scan for Installation
& Maintenance
Instructions

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF

T. 01889 272180 F. 01889 272181 E. sales@intatec.co.uk

www.intatec.co.uk

**03/22
E&OE**