


AWS Grooved High Flat AL Door THR, Light Duty 127 W x 12.7mm H -Choice of Length 914 to 3048mm

From: £67.56
To: £597.11

Inc. VAT

Product Code: 4LA840116

Product Images

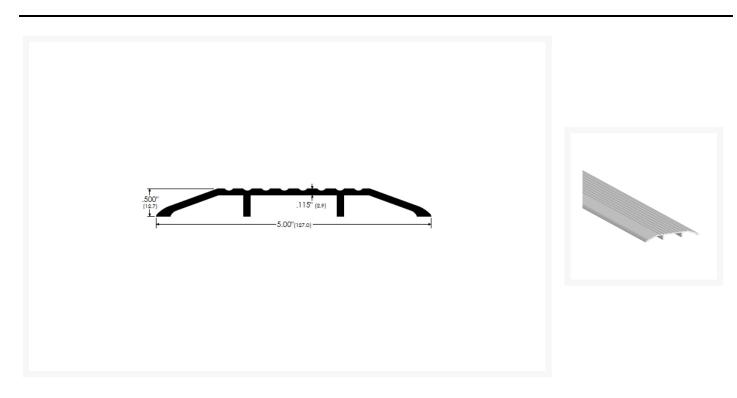

Product Options

Width x Height x Length ft / mm

127 W x 12.7 H x 3ft / 914mm L 127mm wide high flat threshold, 12.7mm high. Aluminium, mill finish. 914mm (3ft) length. For light duty installations. 127 W x 12.7 H x 4ft / 1219mm L £70.71
127 W x 12.7 H x 4ft / 1219mm L £70.71
127mm wide high flat threshold, 12.7mm high. Aluminium, mill finish. 1219mm (4ft) length. For light duty installations.
127 W x 12.7 H x 6ft / 1829mm L 127mm wide high flat threshold, 12.7mm high. Aluminium, mill finish. 1829mm (6ft) length. For light duty installations.
127 W x 12.7 H x 7ft / 2134mm L 127mm wide high flat threshold, 12.7mm high. Aluminium, mill finish. 2134mm (7ft) length. For light duty installations.
127 W x 12.7 H x 10ft / 3048mm L 127mm wide high flat threshold, 12.7mm high. Aluminium, mill finish. 3048mm (10ft) length. For light duty installations.

Description

Aluminium high utility grooved door threshold for light duty installations.

High flat threshold at 12.7mm in height.

Key benefits:

- For internal and external doors
- Ideal for light duty installations
- Aluminium mill finish
- Grooved top
- Simple to install
- Fixing holes un-drilled
- Non flammable

Technical details:

- Choice of Length: 914mm (3 ft), 1219mm (4 ft), 1829mm (6 ft), 2134mm (7 ft) and 3048mm (10 ft)
- Width: 127mm (5")
- Height: 12.7mm (0.5")
- Material: 2.9mm (0.115") thick aluminium

Installation Instructions:

- Measure and cut threshold to size as required
- Notch as necessary, to suit door frame
- Caulk underneath and around edges of threshold for moisture control
- Attach threshold to floor surface with screws provided

Additional Information

Manufacturer	AWS
Application	12.7mm High Flat
Length (mm / feet)	914 / 3', 1219 / 4', 1829 / 6', 2134 / 7', 3048 / 10'
Width (mm / inches)	127 / 5"
Supplied Pre-drilled	No