





Independent 4 Life

# AWS Grooved High Flat AL Door THR 152 W x 12.7 H - Choice of Length 914 to 3048mm


From: £93.25  
To: £854.21  
Inc. VAT

Product Code: 4LA840121

## Product Images



- 1 Measure and cut threshold to size as required.
- 2 Notch as necessary, to suit door frame.
- 3 Caulk underneath and around edges of threshold for moisture control.
- 4 Attach threshold to floor surface with screws provided.

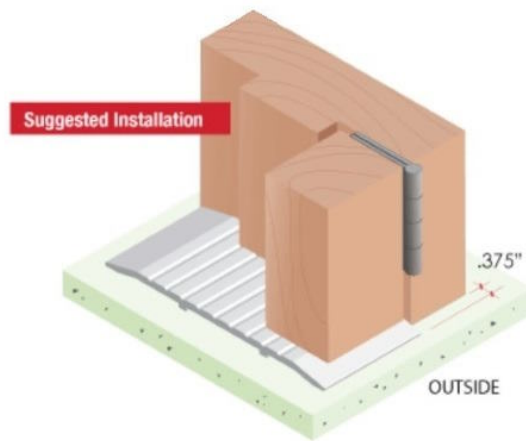

# Product Options

Width x Height x Length ft / mm



**152 W x 12.7 H x 3ft / 914mm L**

£77.71

152.4mm wide x 12.7mm high, heavy duty aluminium mill finished high profile flat door saddle threshold, suitable for internal and external doors - 914mm ( 3ft ) length.



**152 W x 12.7 H x 4ft / 1219mm L**

£99.28

152.4mm wide x 12.7mm high, heavy duty aluminium mill finished high profile flat door saddle threshold, suitable for internal and external doors - 1219mm ( 4ft ) length.



**152 W x 12.7 H x 6ft / 1829mm L**

£142.38

152.4mm wide x 12.7mm high, heavy duty aluminium mill finished high profile flat door saddle threshold, suitable for internal and external doors - 1829mm ( 6ft ) length.



**152 W x 12.7 H x 7ft / 2134mm L**

£163.93

152.4mm wide x 12.7mm high, heavy duty aluminium mill finished high profile flat door saddle threshold, suitable for internal and external doors - 2134mm ( 7ft ) length.



**152 W x 12.7 H x 10ft / 3048mm L**

£228.53

152.4mm wide x 12.7mm high, heavy duty aluminium mill finished high profile flat door saddle threshold, suitable for internal and external doors - 3048mm ( 10ft ) length.

# Description

---

Aluminium high utility grooved door threshold made of heavy-gauge 5.1mm thick aluminium that is designed to stand up to the demands of heavy traffic as well as temperature extremes.

This heavy-gauge aluminium allows you to drill and screw our door thresholds into concrete without the difficulties you are likely to find using lighter materials, such as buckling under heavy loads or loose fixing screws.

**Key benefits:**

- For internal and external doors
- For heavy duty use
- Aluminium mill finish
- Grooved top
- Un-drilled fixing holes
- Ideal for Commercial and Domestic installations
- Non flammable
- Simple to install

**Technical details:**

- Choice of Length: 914mm (3 ft), 1219mm (4 ft), 1829mm (6 ft), 2134mm (7 ft) and 3048mm (10 ft)
- Width: 152.4mm (6.0")
- Height:12.7mm (0.500")
- Material: 5.1mm (0.200") thick heavy-gauge aluminium

**Installation instructions:**

- Measure and cut threshold to size as required
- Notch as necessary, to suit door frame
- Caulk underneath and around edges of threshold for moisture control
- Attach threshold to floor surface with screws provided

# Additional Information

---

Manufacturer	AWS
Application	12.7mm High Flat
Length (mm / feet)	914 / 3', 1219 / 4', 1829 / 6', 2134 / 7', 3048 / 10'
Width (mm / inches)	152.4 / 6"
Supplied Pre-drilled	No