






Independent 4 Life



AWS Modular Ramp System 305 W Alu. Ramp, 0 to 24.5mm Rise - Choice of Length 914 to 3048mm

From: £212.44
To: £1,967.69
Inc. VAT

Product Code: RMP-003-001

Product Images

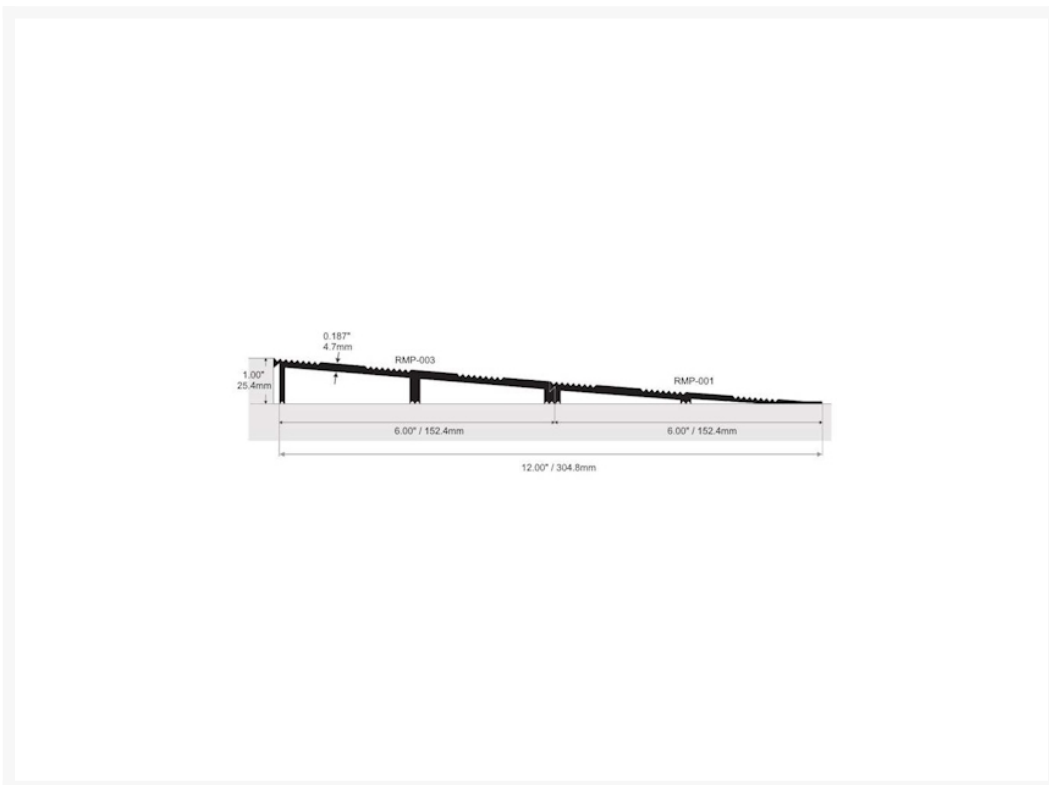

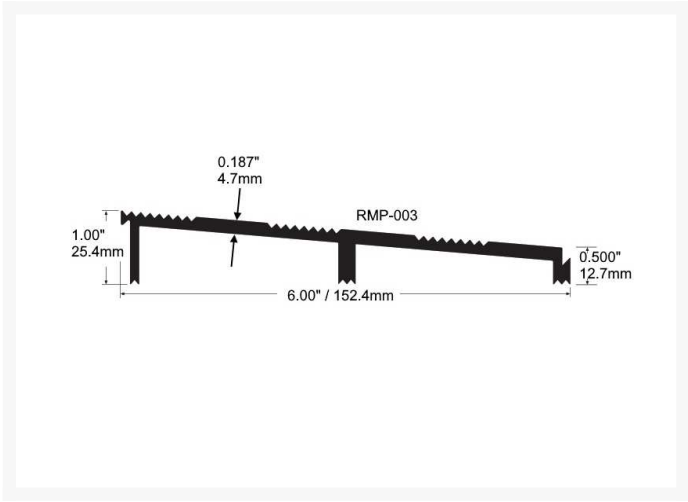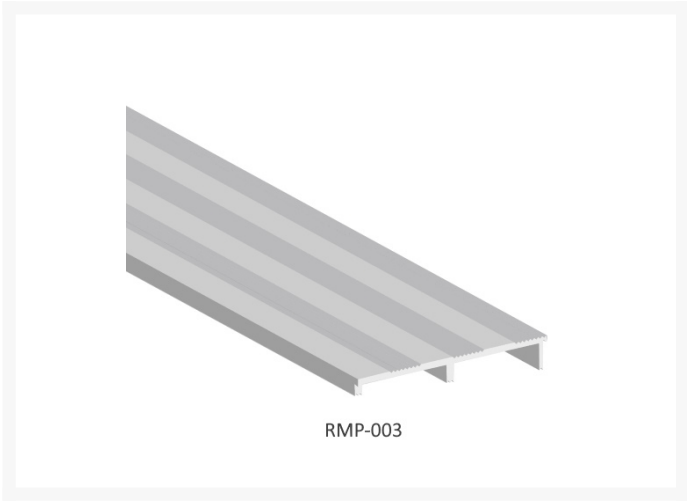


Product Options

Length / Width / Rise Height (mm)

3ft / 914 L / 305 W / 0 to 24.5mm Rise


£177.03



2x Interlocking aluminium grooved ramp sections, suitable for overcoming wheeled access issues. Pair of interlocking ramps from the AWS Modular Ramp system, this set includes the RMP-003 and RMP-001 ramp sections. Rises from 0mm to 24.5mm with an overall width of 305mm (12.00") Gradient of 1:12. Aluminium, mill finish. Undrilled. Length (3ft) 914mm.

4ft / 1219 L / 305 W / 0 to 24.5mm Rise


£227.35



2x Interlocking aluminium grooved ramp sections, suitable for overcoming wheeled access issues. Pair of interlocking ramps from the AWS Modular Ramp system, this set includes the RMP-003 and RMP-001 ramp sections. Rises from 0mm to 24.5mm with an overall width of 305mm (12.00") Gradient of 1:12. Aluminium, mill finish. Undrilled. Length (4ft) 1219mm.

6ft / 1829 L / 305 W / 0 to 24.5mm Rise


£327.98



2x Interlocking aluminium grooved ramp sections, suitable for overcoming wheeled access issues. Pair of interlocking ramps from the AWS Modular Ramp system, this set includes the RMP-003 and RMP-001 ramp sections. Rises from 0mm to 24.5mm with an overall width of 305mm (12.00") Gradient of 1:12. Aluminium, mill finish. Undrilled. Length (6ft) 1829mm.

7ft / 2134 L / 305 W / 0 to 24.5mm Rise


£378.29



2x Interlocking aluminium grooved ramp sections, suitable for overcoming wheeled access issues. Pair of interlocking ramps from the AWS Modular Ramp system, this set includes the RMP-003 and RMP-001 ramp sections. Rises from 0mm to 24.5mm with an overall width of 305mm (12.00") Gradient of 1:12. Aluminium, mill finish. Undrilled. Length (7ft) 2134mm.

10ft / 3048 L / 305 W / 0 to 24.5mm Rise

£529.08



2x Interlocking aluminium grooved ramp sections, suitable for overcoming wheeled access issues. Pair of interlocking ramps from the AWS Modular Ramp system, this set includes the RMP-003 and RMP-001 ramp sections. Rises from 0mm to 24.5mm with an overall width of 305mm (12.00") Gradient of 1:12. Aluminium, mill finish. Undrilled. Length (10ft) 3048mm.

Description

Aluminium grooved ramp modular interlocking ramps that rise from 0mm to a height of 24.5mm total width of 304.8mm and a Gradient of 1:12.

Pair of interlocking ramps from the AWS Modular Ramp systems this set includes the RMP-003 and RMP-001 ramp sections.

All sections of the AWS system can be locked together, providing the bearing surface is sound and level.

The 4.7mm gauge aluminium allows you to drill and screw the ramp into concrete without the difficulties you are likely to find using lighter materials - such as buckling under heavy loads or loose fixing screws.

Key benefits:

- Interlocking ramp sections with a 24.5mm rise
- Suitable for internal and external applications
- The ramps are perfect for overcoming the problems of differences in finished floor levels
- Can be cut down and notched easily on site to suit specific requirements
- Manufactured from mill aluminium
- Grooved non-slip surface
- Suitable for DDA applications
- Supplied undrilled
- Ideal for commercial and domestic installations
- Non flammable

Technical details:

- Choice of Length: 914mm (3 ft), 1219mm (4 ft), 1829mm (6 ft), 2134mm (7 ft) and 3048mm (10 ft)
- RMP-001 ramp width: 152.4mm (6")
- RMP-001 ramp height: 0mm (0.0") on one side, to 12.7mm (0.500") on the other
- RMP-001 ramp section height rise: 12.7mm (.500")
- Gradient: 1:12
- RMP-003 ramp width: 152.4mm (6")
- RMP-003 ramp height: 12.7mm (0.500") on one side, to 25.4mm (1.00") on the other
- RMP-003 ramp section height rise: 12.7mm (.500")
- Gradient: 1:12
- Material: 4.7mm (0.187") thick medium gauge aluminium

Installation Instructions:

- Measure and cut the ramp to size as required
- Notch as necessary, to suit any door frames
- For maximum stability and strength it is recommended the ramp is bedded on fast setting epoxy adhesive / filler
- Attach ramp to the floor surface with suitable counter sunk fixing screws

Additional Information

| | |
|----------------------|---|
| Manufacturer | AWS |
| Application | Modular Ramp |
| Length (mm / feet) | 914 / 3', 1219 / 4', 1829 / 6', 2134 / 7', 3048 / 10' |
| Width (mm / inches) | 304.8 / 12.00" |
| Gradient | 1:12 |
| Supplied Pre-drilled | No |