







Independent 4 Life


# AWS Modular Ramp System 381 W Alu. Ramp, 0 to 31.8mm Rise - Choice of Length 914 to 3048mm

From: £272.09  
To: £2,406.75  
Inc. VAT

Product Code: RMP-007x3-001

## Product Images

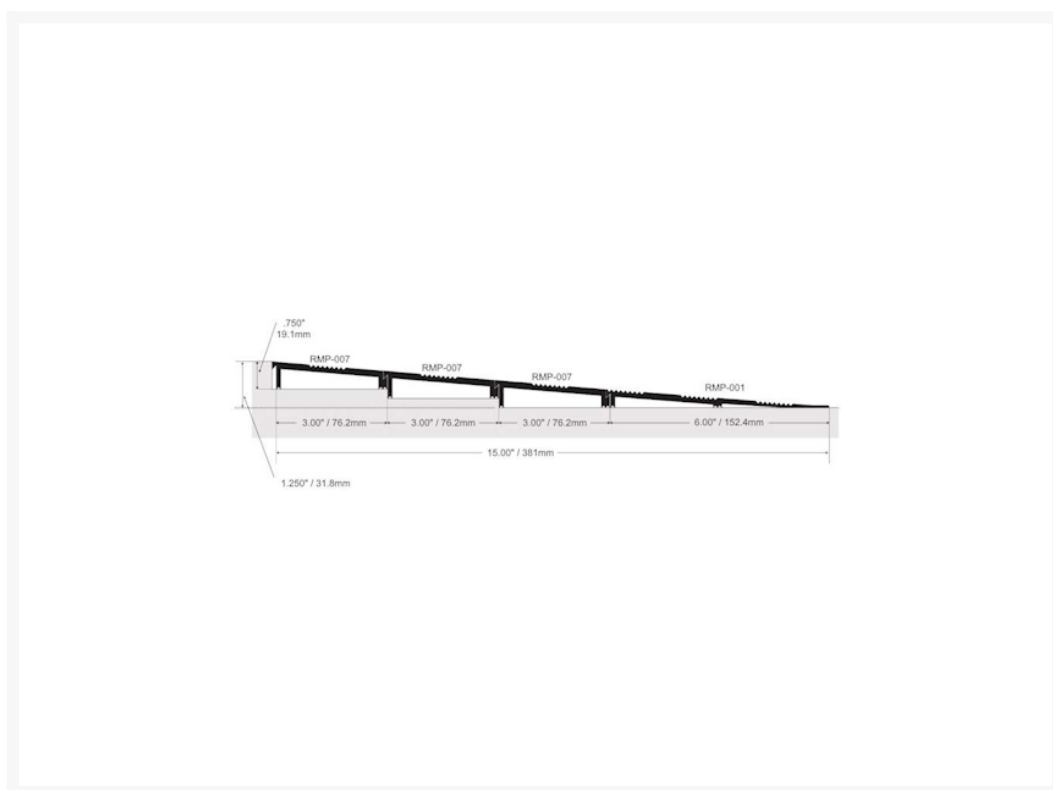

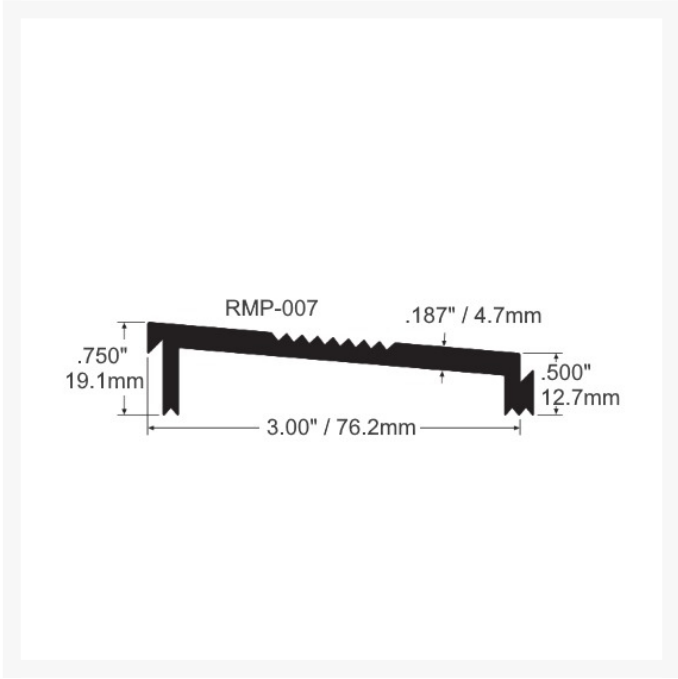


# Product Options

## Length / Width / Rise height (mm)

### 3ft / 914 L / 381 W / 0 to 31.8mm Rise


£226.74



4x Interlocking aluminium grooved ramp sections, suitable for overcoming wheeled access issues. A set of interlocking ramps from the AWS Modular Ramp system this set includes the 3x RMP-003 and a RMP-001 starter ramp section. Rises from 0 to 31.8mm with an overall width of 381mm (15.00") Gradient of 1:12. Aluminium, mill finish. Undrilled. Length (3 ft) 914mm.

### 4ft / 1219 L / 381 W / 0 to 31.8mm Rise


£284.88



4x Interlocking aluminium grooved ramp sections, suitable for overcoming wheeled access issues. A set of interlocking ramps from the AWS Modular Ramp system this set includes the 3x RMP-003 and a RMP-001 starter ramp section. Rises from 0 to 31.8mm with an overall width of 381mm (15.00") Gradient of 1:12. Aluminium, mill finish. Undrilled. Length (4ft) 1219mm.

### 6ft / 1829 L / 381 W / 0 to 31.8mm Rise


£401.16



4x Interlocking aluminium grooved ramp sections, suitable for overcoming wheeled access issues. A set of interlocking ramps from the AWS Modular Ramp system this set includes the 3x RMP-003 and a RMP-001 starter ramp section. Rises from 0 to 31.8mm with an overall width of 381mm (15.00") Gradient of 1:12. Aluminium, mill finish. Undrilled. Length (6ft) 1829mm.

### 7ft / 2134 L / 381 W / 0 to 31.8mm Rise


£459.30



4x Interlocking aluminium grooved ramp sections, suitable for overcoming wheeled access issues. A set of interlocking ramps from the AWS Modular Ramp system this set includes the 3x RMP-003 and a RMP-001 starter ramp section. Rises from 0 to 31.8mm with an overall width of 381mm (15.00") Gradient of 1:12. Aluminium, mill finish. Undrilled. Length (7ft) 2134mm.

**10ft / 3048 L / 381 W / 0 to 31.8mm Rise**

£633.54



4x Interlocking aluminium grooved ramp sections, suitable for overcoming wheeled access issues. A set of interlocking ramps from the AWS Modular Ramp system this set includes the 3x RMP-003 and a RMP-001 starter ramp section. Rises from 0 to 31.8mm with an overall width of 381mm (15.00") Gradient of 1:12. Aluminium, mill finish. Undrilled. Length (10ft) 3048mm.

## Description

Aluminium grooved ramp modular interlocking ramps that rise from 0mm to a height of 31.8mm total width of 381mm and a Gradient of 1:12.

A set of interlocking ramps from the AWS Modular Ramp system this set includes the 3x RMP-003 and a RMP-001 starter ramp section.

All sections of the AWS system can be interlocked together, providing the bearing surface is sound and level.

The 4.7mm gauge aluminium allows you to drill and screw the ramp into concrete without the difficulties you are likely to find using lighter materials - such as buckling under heavy loads or loose fixing screws.

### Key benefits:

- Interlocking ramp sections with a total 31.8mm rise, note this ramp requires steps - see main product image / drawing
- Suitable for internal and external applications
- The ramps are perfect for overcoming the problems of differences in finished floor levels
- Can be cut down and notched easily on site to suit specific requirements
- Manufactured from mill aluminium
- Grooved non-slip surface
- Suitable for DDA applications
- Supplied undrilled
- Ideal for commercial and domestic installations
- Non flammable

### Technical details:

- Choice of Length: 914mm (3 ft), 1219mm (4 ft), 1829mm (6 ft), 2134mm (7 ft) and 3048mm (10 ft)
- RMP-001 ramp width: 152.4mm (6")
- RMP-001 ramp height: 0mm (0.0") on one side, to 12.7mm (0.500") on the other
- RMP-001 ramp section height rise: 12.7mm (.500")
- Gradient: 1:12
- 3 x RMP-007 ramp width: 76.2mm (3")
- RMP-007 ramp height: 12.7mm (.500") on one side, to 19.1mm (.750") on the other
- RMP-007 each ramp section height increase: 6.4mm (.250")
- Gradient: 1:12
- Material: 4.7mm (0.187") thick medium gauge aluminium

## Installation Instructions:

- Measure and cut the ramp to size as required
- Notch as necessary, to suit any door frames
- For maximum stability and strength it is recommended the ramp is bedded on fast setting epoxy adhesive / filler
- Attach ramp to the floor surface with suitable counter sunk fixing screws

## Note:

- Please note: To achieve the height shown in the main image / drawing, further work will be required to construct a solid stepped base prior to installation

## Additional Information

---

Manufacturer	AWS
Application	Modular Ramp
Length (mm / feet)	914 / 3', 1219 / 4', 1829 / 6', 2134 / 7', 3048 / 10'
Width (mm / inches)	381 / 15.00"
Gradient	1:12
Supplied Pre-drilled	No