




Independent 4 Life

AWS Wet Room FL Compressible Threshold 44 W x 13mm H - Choice of Lengths 914 to 3048

From:	£86.58
To:	£787.37
Inc. VAT	


Product Code: 4LA840245

Product Images

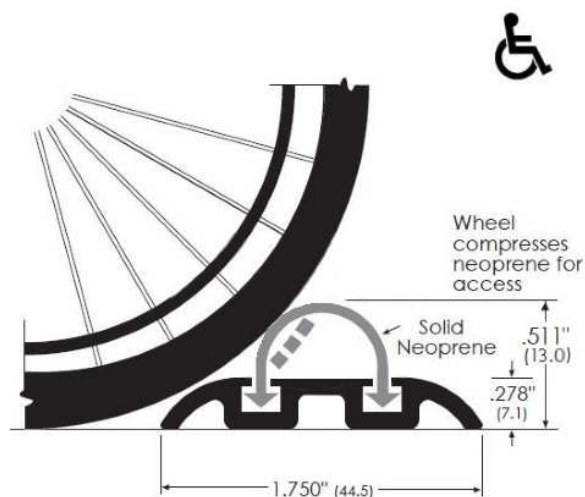

Product Options


Width x Height (10mm Compressed height) x Length (ft / mm)



44 W x 13mm H x 3ft / 914 L

£72.15


Wet room water barrier floor threshold 7mm to 13mm height, with compressible neoprene gasket for DDA. Ideal for use between wet and dry floor coverings - 914mm (3ft) length.



44 W x 13mm H x 4ft / 1219 L

£91.85


Wet room water barrier floor threshold 7mm to 13mm height, with compressible neoprene gasket for DDA. Ideal for use between wet and dry floor coverings - 1219mm (4ft) length.



44 W x 13mm H x 6ft / 1829 L

£131.24


Wet room water barrier floor threshold 7mm to 13mm height, with compressible neoprene gasket for DDA. Ideal for use between wet and dry floor coverings - 1829mm (6ft) length.



44 W x 13mm H x 7ft / 2134 L

£150.94

Wet room water barrier floor threshold 7mm to 13mm height, with compressible neoprene gasket for DDA. Ideal for use between wet and dry floor coverings - (7ft) 2134mm length.



44 W x 13mm H x 10ft / 3048 L

£209.96

Wet room water barrier floor threshold 7mm to 13mm height, with compressible neoprene gasket for DDA. Ideal for use between wet and dry floor coverings - (10ft) 3048mm length.

Description

Compressible water barrier threshold, designed for use when a wet room shower area must be accessible to a wheelchair.

The 7.1mm high aluminium threshold with 5.9mm high compressible neoprene insert.

The threshold should be bedded on silicone mastic to prevent water seepage underneath your vinyl or tiled flooring and where possible without breaching your waterproofing system or underfloor heating the threshold should be screwed to the floor.

With an overall height of 13mm with the neoprene gasket fitted, this threshold is ideal for water containment within wet rooms while not impeding wheeled access, keeping water in while allowing the wheels to pass over easily.

Key benefits:

- Compressible water barrier for door ways and showering areas
- Smooth curved edges on both sides
- Aluminium mill finish
- Suitable for DDA applications
- Fixing holes undrilled
- Ideal for Commercial and Domestic installations
- Simple to install

Technical details:

- Choice of Length: 914mm (3 ft), 1219mm (4 ft), 1829mm (6 ft), 2134mm (7 ft) and 3048mm (10 ft)
- 44.5mm / 1.750" wide
- Low-profile aluminium base: 7.1mm / 0.278"
- 13mm / 0.511" overall height with inset compressible 2mm thick neoprene gasket
- 10mm approx. compressed height

Installation Instructions:

- Measure and cut threshold to size as required
- Bed on silicone mastic to prevent water seepage underneath
- Use mechanical fixings if there is no underfloor heating and or wet room waterproofing system
- Slide in neoprene gasket

Previous Product Codes:

- 4LA840246, 4LA840247, 4LA840248 and 4LA840249

Additional Information

Manufacturer	AWS
Length (mm / feet)	914 / 3', 1219 / 4', 1829 / 6', 2134 / 7', 3048 / 10'
Height (mm)	13
Supplied Pre-drilled	No