


AKW Tuff Form Wet Room Floor Former – Multiple Sizes & Optional Waste Outlet

£196.80 Inc. VAT


Product Code: TUFFFORM


Product Images

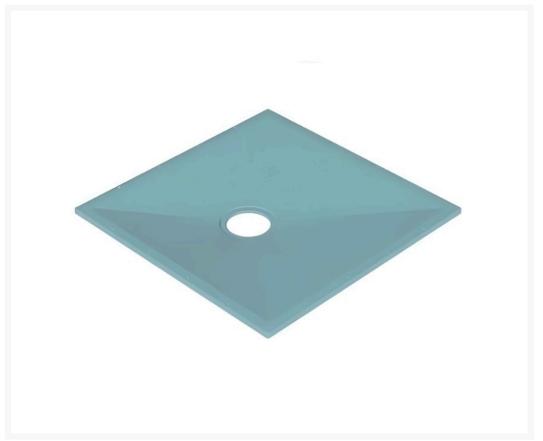








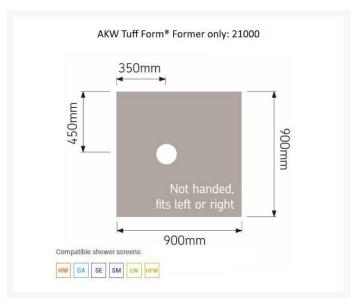








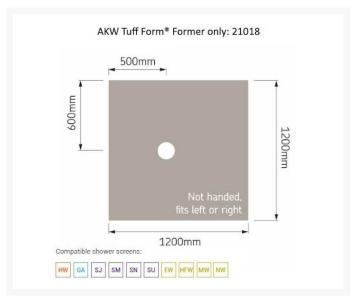

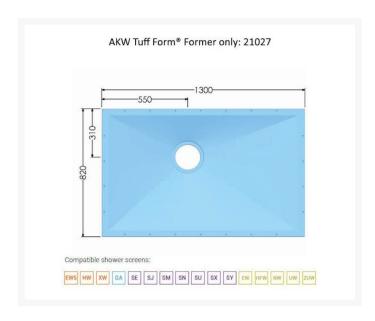

Product Options

Floor Former Size (mm)	Price Inc. VAT
900x900	£196.80
1000×1000	£196.80
1135x770	£196.80
1200x900	£196.80
1200x1200	£196.80
1300x820	£196.80
1400x900	£196.80
1500x820	£196.80
1500x1200	£439.20
1800x820	£250.80

Additional Options

Product Code / Waste options - Vinyl Flooring	25106 / TF 75 Gravity Waste for Vinyl Flooring	£22.68
	25414 / Silentflow Pumped Waste for Vinyl Flooring	£56.63
	25124 / GW50 Gravity Waste for Vinyl Flooring	£29.38
	25129 / GW19 Gravity Waste for Vinyl Flooring	£29.38
	25419-UK / Low Height Dry Waste with TF Vinyl Floor Adaptor	£45.00
	25499-UK / GW90 Low Depth Gravity Waste for Vinyl Flooring	£72.00
Product Code / Waste options - Tiled Flooring	LB00101 / TF 75 Gravity Waste for Tiled Flooring	£50.74
	25498-UK / GW90 Low height Gravity Waste for Tiled Flooring	£72.00
	25418-UK / DW90 Low Depth Gravity Waste for Tiled Flooring	£50.40

Description

The AKW Tuff Form Level Best floor former for creating level access wet rooms.

Easy to install, it is suitable for timber or concrete installations, and can be rotated and trimmed to size if required.

Key benefits:

- Creates a complete level access wet room shower area once completed with vinyl safety sheet flooring or tiled flooring when a tanking kit is also used (not included)
- Very strong at only 22mm thick can withstand loads of up to 381kg (60 stone)
- Suitable for both wooden and screed floor installations
- Fully recyclable made from reusable plastic
- Choice of size:

Technical details:

- Thickness (mm): 22
- Waste hole diameter: 160mm
- Load capacity (kg): 381
- Materials: GRP
- European Fire Safety Rating: CFI-s2

Installation:

- Unhanded with offset waste position to avoid joists
- Can be cut to length or trimmed to within 150mm of the waste without losing any strength integrity
- Pre-formed fixing holes

• Ribbed design on the underside eliminates slippage or float during installations

Waste options:

- Waste options for vinyl safety sheet flooring search for the following product codes:
- 25106, 25414, 25124, 25129, 25419-UK, 25499-UK
- Waste options for tiled flooring search for the following product codes:
- LB00101, 25498-UK, 25418-UK

Warranty:

• Lifetime manufacturer guarantee

Manufacturer product codes:

• 21000, 21002, 21006, 21008, 21012, 21014, 21015, 21018, 21020, 21027, 21028, 21029, 21030, 21036, 21038, 21045, 21046, 21050, 21052

Additional Information

Manufacturer	AKW / Contour
Brand / Model	AKW - Tuff Form
Size (mm)	900x900, 1000x1000, 1135x770, 1200x900, 1200x1200, 1300x820, 1400x900, 1500x820, 1500x1200, 1800x820
Floor Former Thickness (mm)	22
Waste Option / Floor Finish	AKW GW19 Gravity Waste - Vinyl, AKW GW50 Gravity Waste - Vinyl, AKW GW90 Low Depth Gravity - Vinyl, AKW GW90 Low Depth (Dry) Gravity - Vinyl, AKW DW90 Low Depth Gravity - Tiled, AKW GW90 Low Height Gravity - Tiled, AKW TF75 Gravity - Vinyl, AKW TF75 Gravity - Tilled, AKW PGTF Pumped - Vinyl, AKW Silentflow Pumped Waste - Vinyl
Floor Finish	Vinyl Flooring
Optional Waste Type	Gravity Waste, Pumped Waste
Flow Rate / I/min	45