



Independent 4 Life

AKW Mullen Surface or Level Access CNR SHWR Tray - Choice of Size & Waste



£382.33 Inc. VAT

Product Code: MULLEN

Product Images



Mullen® Waste Options


 PW93 Pumped Waste 15mm 29106 22mm 29446	 Low Depth DW93 25424
 DW93 Shower Drain Shower Waste 29120	 DW93 Metal Topped Shower Drain Waste 25434
 DW93 Low Depth Dry Shower Waste 25420	


Intergrig® Clamping Strip

The key benefit of the Mullen® shower tray is its unique clamping strip (Intergrig®) which grips and seals vinyl flooring into the tray for a watertight seal.

Features & Benefits



* Flooring can be fitted or changed after the tray and covers have been installed, avoiding unnecessary site visits.




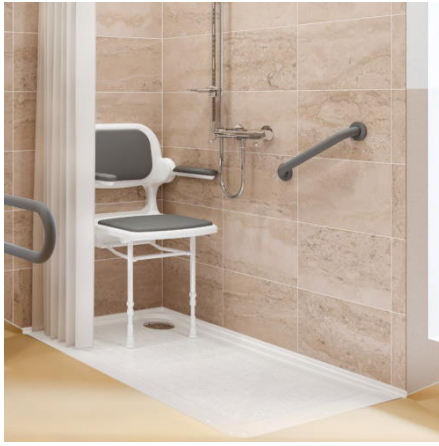


Mullen® Shower Tray: Concrete Floor Installation Guide

Slippage or float during installation is eliminated by the ribbed design of the underside which allows the tray to key into soft cement or screed.





Resilient Flooring - Completely level access

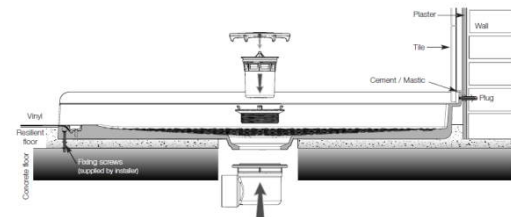
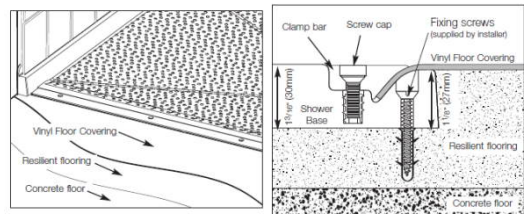


Mullen® Shower Tray: Wooden Floor Installation Guide

AKW Mullen tray to be fitted on timber supports.



Wooden Floors - Completely level access

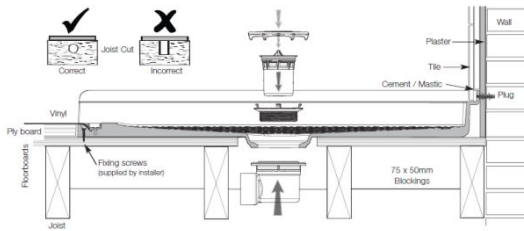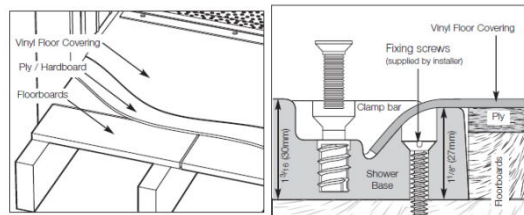

Tray and Screen Compatibility

Tray Size	Compatible Screens
1000 x 1000	BF, C, H, SE, GA, GB, E, HF
1200 x 700	BF, C, D, H, K, SE, SX, SY, GA, GB, A, E, HF
1200 x 820	B, C, H, SE, SX, SY, GA, GB, E, HF
1300 x 700	B, C, H, J, G, U, Y, SE, SJ, SM, SN, SU, SX, SY, GA, GB, A, E, HF, M, N
1300 x 820	C, H, J, U, Y, SE, SJ, SM, SN, SU, SX, SY, GA, GB, E, HF, M, N
1420 x 700	B, H, J, K, G, U, X, Y, SE, SJ, SM, SN, SU, SX, SY, GA, GB, HF, N
1524 x 762	N
1524 x 915	N
1800 x 700	H, P, TT, Z, SJ, SN, SU, GA, GB, HF
1800 x 820	H, P, TT, Z, SJ, SN, SU, GA, GB, HF

■ Standard Shower Screens ■ Sliding Shower Screens
■ Glass Shower Screens ■ Silverdale & Standard Shower Screens

Product Options

Tray Size (mm)	Price Inc. VAT
1000x1000	£422.14
1200x700 LH	£382.33
1200x700 RH	£382.33
1200x820 LH	£414.82
1200x820 RH	£414.82
1300x700 LH	£414.07
1300x700 RH	£414.07
1300x820 LH	£451.80
1300x820 RH	£451.80
1420x700 LH	£452.29
1420x700 RH	£452.29

Additional Options

AKW Code / Waste option	25120 / GW90 Gravity Waste - CHR Plastic Top	£24.01
	25434 / GW90 Gravity Waste - Metal Topped	£36.32
	25404 / Low Depth GW90 - CHR Plastic Top	£13.55
	25492-UK / DW90 Low Depth Dry Waste - CHR Plastic Top	£33.43
	25105 / PW90 Pumped, 15mm Outlet - CHR Plastic Top	£10.47
	25406 / PW90 Pumped, 22mm Outlet - CHR Plastic Top	£10.47

Description

The AKW Mullen corner shower tray is 27mm thick tray, range of sizes and handing. Offset corner 90mm waste hole for quick and easy installation to avoid joists. Choice of GW90 Gravity or the PW90 Pumped wastes with either 15 or 22mm outlets.

Suitable for timber and screed floors, can be surface mounted or recessed for level access. The trays slip resistant textured surface decreases the risks of accidents when using the shower.

Vinyl safety flooring can be clamped to the side of the tray for a leak free joint. Non-slip floor tiles can be used which also requires the Floor Tiling Adaptor kit (Product code: 26259).

The tray is compatible with AKW Standard, Sliding, Glass and Silverdale shower screens, check the image gallery for the compatibility chart.

Key benefits:

- Corner shower tray for level access where the client needs a defined showering area
- Unique vinyl safety flooring integrated clamping strip allows for quick and watertight installations
- Flooring can be fitted after the tray and screen have been installed avoiding unnecessary site visits
- Built in tiling upstands on 2 sides complete the all-round integrity of the water seals
- Suitable for point loading from seats
- Weight limited 190kg / 30 stone
- No under tray foaming is needed
- Corner waste position helps avoid joists
- Ribbed underside eliminating slippage or float during installation
- Watertight seals with the Intergrip® strip for joining vinyl sheet flooring to the tray edge
- Quick draining, with a 25mm fall inside the tray
- Unrivalled strength and stability, using compressed GRP
- Pre-formed fixing holes ensure quick and easy installation
- Slip resistant textured surface
- Floor tiling, wallboard adaptor, and pipe duct kits are available separately to aid any installation

Waste options:

AKW: 25120 - GW90 90mm Dia. Gravity Waste (50mm Water Trap)

- - Flow rate: approx. 31 litres per minute
- - Installation depth required below tray (mm): 90
AKW: 25434 - GW90 Metal Topped 90mm Dia. Waste
- - Flow rate: approx. 31 litres per minute
- - Installation depth required below tray (mm): 60
AKW: 25404 - Low Depth GW90 Waste (50mm Water Trap)
- - Flow rate: approx. 14 litres per minute
- - Installation depth required below tray (mm): 60
AKW: 25492-UK - DW90 Low Depth Dry Shower Waste
- - Non return valve ensures the trap always retains water
- - Flow rate: 27 l/min with 15mm head and 1m of pipe
- - Installation depth required below tray (mm): 48
AKW: 25105 / 25406 - PW90 Pumped Waste
- - Outlet pipe (mm): 15 / 22
- - Installation depth required below tray (mm): 36

Technical details:

- 27mm tray height
- Range of tray sizes, select as required below
- All trays width and depth + 50mm flange
- Screed floors require a 27mm recess for level access
- Can be surface mounted on screed floors, ramps are available for installation above or below vinyl flooring
- Timber floors require plywood (not included) to increase the floor up to the tray height, for complete level access
- Corner 90mm waste outlet hole
- Choice of gravity or pumped wastes
- Unrivalled strength and stability, manufactured from compressed GRP

Warranty:

- Lifetime manufacturer warranty

Manufacturer product codes:

- Tray only code: 26100, 26101L, 26101R, 26072L, 26072R, 26102L, 26102R, 26107L, 26107R, 26104L, 26104R
- Tray with Gravity Waste code: 26074, 26106L, 26106R, 26073L, 26073R, 26109L, 26109R, 26111L, 26111R, 26110L, 26110R

Additional Information

Manufacturer	AKW / Contour
Model	AKW - Mullen
Tray Size (mm)	1000x1000, 1200x700 - LH, 1200x700 - RH, 1200x820 - LH, 1200x820 - RH, 1300x700 - LH, 1300x700 - RH, 1300x820 - LH, 1300x820 - RH, 1420x700 - LH, 1420x700 - RH
Handing	Left Hand, Right Hand, Unhanded
Entry Configuration	Front Entry (Alcove), Corner Entry
Step-in Height (mm)	Level Access - 0, Low Level Step-in - 27
Thickness of Tray (mm)	27
Waste Compatibility	Gravity Waste, Pumped Waste
Tray Edge for Floor Finish	Yes - Vinyl or Tiles
Ramp or Step Available	Ramp