



Independent 4 Life



AKW Digipump M20 w/ Silentflow+ Waste (PGTF)

£908.40 Inc. VAT

Product Code: 25486

Product Images



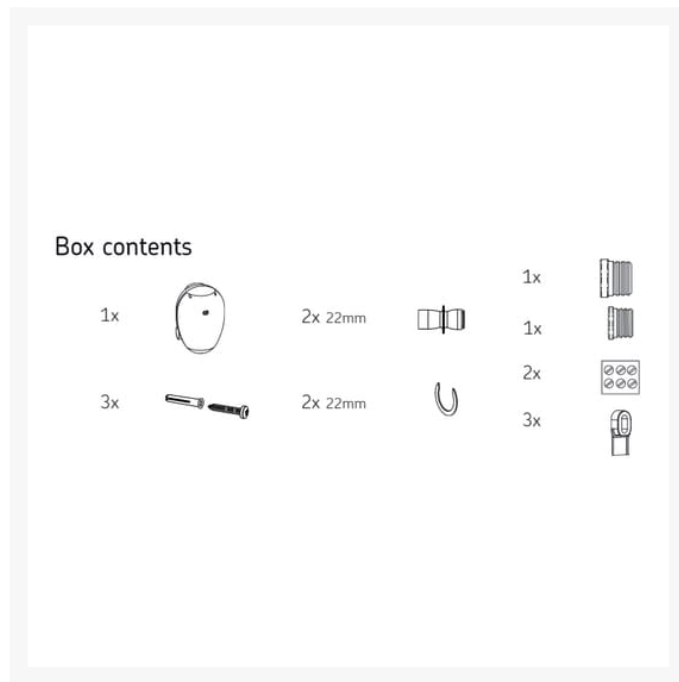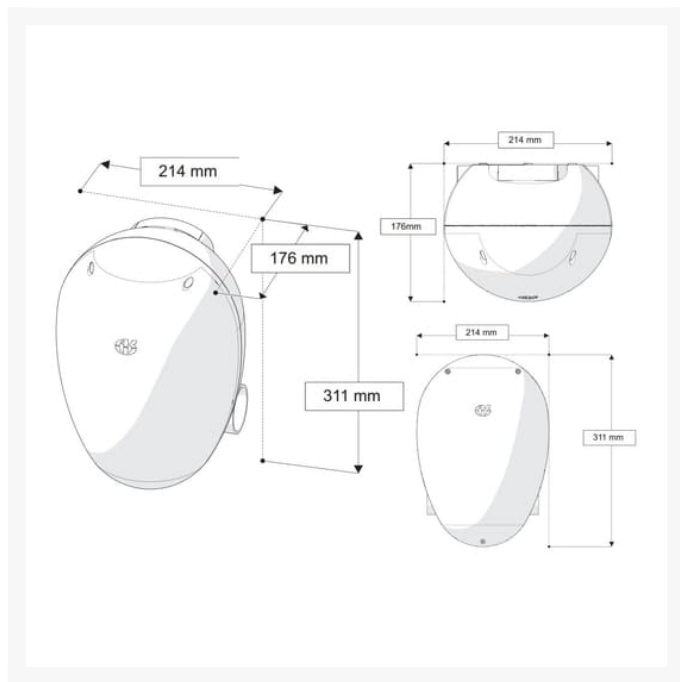

Additional Options

AKW Code / Optional Flow Switch for Hot Feed

25194 / Flow Sensor Kit for Dual Feed Showers

£74.51

Description

The digipump M20 with silentflow+ waste is designed to provide a quiet, reliable, and high-performance waste drainage in showering areas where gravity drainage is not achievable.

Quiet and easily serviceable this pump is designed for better removal of debris, the start up and run on settings ensures full drainage of the shower tray.

A hard-wire connection can be made to the flow sensor of ITherm electric showers and many other brands, but this also offers a wireless connection to the flow sensor within AKW SmartCare Plus Lever electric showers.

Key benefits:

- Extremely quiet operation
- Control box with built in test facility
- Compact making it ideal for bathrooms with limited space
- Pump head has 4 valves allowing for efficient debris removal
- Two non-return valves prevent water flowing back through the pump
- Low maintenance solution reducing inconvenience to users
- Compatibility with electric and mixer showers enabling greater flexibility based on user needs
- Delayed start up and run on settings
- Easy to use functionality that requires no additional effort by user

- Flow meter input automatically adjusts to variations in the water supply
- Increased accuracy when flow rates are matched
- Non-handed unit - pump head can be rotated to allow flow in either direction
- A wired or wireless connections offers the installer flexibility when fitting, as this can be tailored to the space, with wireless connections eradicating the need for post-installation decorative work

Additional components:

- Flow sensor kits for dual feed showers (Product Code: 25194)

Includes Silentflow+ PGTF 22mm Pumped Waste for Vinyl Flooring (Product Code: 25414):

- Pumped waste gully
- For use with AKW Tuff Form floor formers and vinyl flooring
- 22mm outlet pipe
- 48mm depth below tray
- Integrated baffles reduce the noise escaping from the chambers within the waste
- Grate opens for easy cleaning and rodding
- Grate is secured to the waste with bayonet fixings or you can screw the grate down
- Quiet performance at all flow rates
- Compatible with all AKW Pumps

Technical details:

- Pump size (mm): 214 W x 311 H x 176 D
- Connectors attached width (mm): 244
- 22mm inlet and outlet connectors
- Max. outlet head 1m (39in)
- Max. inlet lift 0.5m (20in)
- Max. combined head and lift 1.5m (59in)
- Duty cycle: 30 mins max. on 50% duty (30 mins on / 30 mins off)
- On/Off, 600, 1000 (default), 2200 pulses per min
- Supply: 230V AC, 50Hz, 100W
- 24 VDC operation
- 20 litres per minute max under head/lift conditions
- 5 amp fuse
- Internal TGA fuse
- IP45 Enclosure for bathrooms
- Pump complies to BS7671

Warranty:

- 7 year manufacturer warranty (based upon correct installation and appropriate application)

Additional Information

Manufacturer	AKW / Contour
Application	Vinyl Sheet Safety Flooring