




Independent 4 Life


AKW Onyx Combo L Shape Grab Rail & Mixer Shower LH

£575.26 Inc. VAT

Product Code: 25436L-LS

Product Images



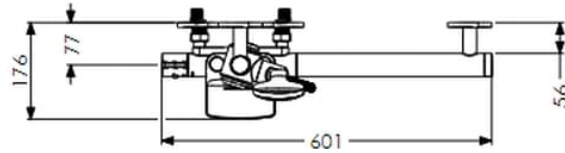

Description

AKW Onyx Combo with an L shaped left-handed grab rail and mixer shower.

This mixer shower is designed to accommodate varying user needs such as user height with the adjustable holder or a 2m long hose providing manoeuvrability when showering independently or with assistance. TMV2 and WRAS approval provide peace of mind.

Key benefits:

- Varying user heights accommodated by adjustable holder for roaming handset
- Multifunctional shower head offers 3 different spray modes
- Multifunctional shower head features silicone nozzles for ease of cleaning
- Easy to clean
- Mixer valve is cool to touch when in use preventing scalding
- two lever paddles allowing for easy to control temperature and flow
- two interchangeable white and black paddles
- Icons on the valve
- 2m long hose provides manoeuvrability when showering
- TMV2 approved mixer valve offers thermostatic protection

Includes:

- 2m Shower hose
- Additional shower head holder
- Sliding shower head bracket
- Interchangeable mixer valve paddles in white and black
- Clear soap dish
- Vertical load bearing riser rail
- Horizontal load bearing grab rail

Technical details:

- Max. grab rail weight load of 150kg
- Fixing points per wall flange: 3
- Wall flanges: 5
- Fixing points for additional shower head holder: 2
- Inlet cold temperature range 4 – 25°C
- Inlet hot temperature range 55 – 65°C
- Temperature range 16 – 49°C
- Safety setting max. temperature: 38°C
- Safety setting override max. temperature: 49°C
- Approx. flow rate: 8.5 l/min (3 bar)
- Inlet connections: ½"
- Outlet fitting: ½"
- Dynamic pressure: 0.5 – 5 bar
- Static pressure 1 – 10 bar
- Horizontal rail length (mm): 601
- Horizontal rail length flange to flange (mm): 342
- Vertical rail length (mm): 900
- Vertical rail length from flange to flange (mm): 755
- Tube diameter horizontal (mm): 42
- Tube diameter vertical (mm): 32
- Wall clearance horizontal (mm): 56
- Wall clearance vertical (mm): 61
- Hose length (mm): 2000
- 3 mode, lever twist shower head

Approvals:

- WRAS Approved
- TMV2 Approved

Manufacturer warranty:

- 3 year manufacture warranty

Additional Information

| | |
|--------------------------------|---|
| Manufacturer | AKW / Contour |
| Shower Type | Direct Fed (Mixer) |
| Shower Features | Shower Arm, Shower Head, Shower Valves, Adjustable Riser Rail, Shower Head Holder |
| Fixings | Concealed |
| Control | Manual Lever |
| Hose Length (mm) / Application | 2000 / Shower Hose |
| Water Pressure | Normal Mains |
| Technologies | Thermostatic Control, Safe Touch, Anti-Scald, Temperature Adjustable |
| Approvals | WRAS Approved, TMV2 (Domestic Sector) |