


# Geberit Monolith for Wall-hung WC, 114 cm, Front: Sand Grey Glass, Sides: ALU

Product Code: 131.031.JL.5

# **Product Images**

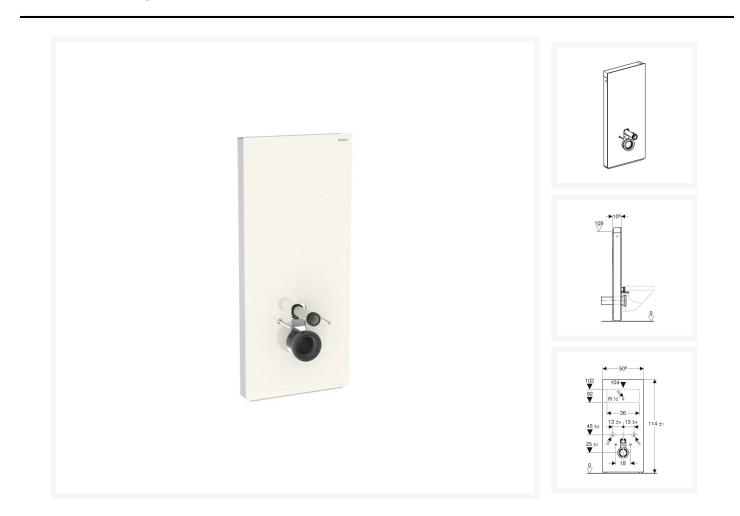

Geberit Monolith for wall-hung WC pans, installed height of 114 cm (1140mm). A stylish dual flush, selfsupporting concealed cistern that is fully insulated against condensation. The front panel is made of 8mm thick Sand Grey glass with brushed aluminium side profiles.

For mounting Geberit AquaClean WC complete solutions and Geberit AquaClean Enhancement solutions with accessories in front of drywalls or solid walls for mounting on finished floors.

## Additional application purposes:

- Ideal for renovations, conversions, and new buildings
- For wall inlets with inlet of height > 23 cm
- For replacing low-level and half-high level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For replacing wall-hung WCs with pressure flushing valve
- For replacing wall-hung WCs with concealed cistern with maximum service opening height < 109 cm
- For compensating the offset between the WC connections and wall drains using a stepped straight connector for wall-hung WCs

### **Key benefits:**

- Dual flush
- Adjustable flush volume
- Self-supporting
- Cistern, fully insulated against condensation
- Compensation of dimensional tolerances possible
- Fastening height WC ceramic appliance 35 ± 1 cm
- Height-adjustable up to 7 cm
- Water supply connection at the rear centre or on the bottom
- Left/right water supply connections possible with accessories (not included)

### Technical details:

- Front cladding: 8mm Sand Grey glass
- Side cladding finish: Brushed aluminium
- Height (mm): 1140 plusmn; 10
- Width (mm): 505
- Depth (mm): 106
- Flow pressure: 0.1-10 bar
- Max. operating water temperature: 25°C
- Flush volume, factory setting: 6 & 3 l
- Flush volume large, adjustment range: 4.5 / 6 l
- Small flush volume: 3 l
- Calculated flow rate: 0.11 l/s
- Max. flow pressure for calculated flow rate: 0.5 bar

### Scope of Delivery:

- Water supply connection set with 2 angle stop valves 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight connector made of PE-HD, ø 90 / 110 mm
- Adaptor socket made of PE-HD, ø 90 / 110 mm
- www.independent4life.co.uk | info@independent4life.co.uk | Tel: 0800 500 3001 | VAT No: 942447711

- 2 threaded rods M12
- Sound insulation set
- Base cover
- Fastening material for drywall
- Fastening material
- Fastening material for installation in front of concealed cisterns

#### Manufacturer warranty:

• 2-year manufacture warranty

#### Please note:

- Due to the hygiene reasons, this product is non-returnable
- Geberit will extend the warranty by one year if installed by a registered installation company and if you register on Geberit's website or return the supplied warranty card within 90 working days of the installation

Manufacturer	Geberit
Brand / Model	Geberit / Monolith
Can Be Combined With	Geberit AquaClean Sela WH WC Complete, Geberit AquaClean Mera Comfort WH WC Complete, Geberit AquaClean Mera Classsic WH WC Complete, Geberit Selnova WH WC, Premium, Geberit iCon WH WC, Geberit AquaClean WC Enhancement Solutions with Accessories, Conversion Set for Geberit AquaClean WC Enhancement
Colour	Sand Grey Glass
Frame Size (mm)	Frame Height: 1140
Technical Info.	Factory Setting - Small Flush: 3 l, Flush Volume Factory Setting - 6 and 3 l, Flush Volume Large Adjustment Range - 4.5 / 6 l
Waste Outlet Position	Wall - Rear
Warranty	2 Year Standard
Flush Operation	Top Dual Push Button Flush
Technologies	Dual Flush

## **Additional Information**