


# Geberit Monolith Plus for Floor-standing WC, 101 cm, Front: Stoneware Slate Look, Sides: Black Chrome ALU

£2,789.70 Inc. VAT

Product Code: 131.202.00.7

### **Product Images**



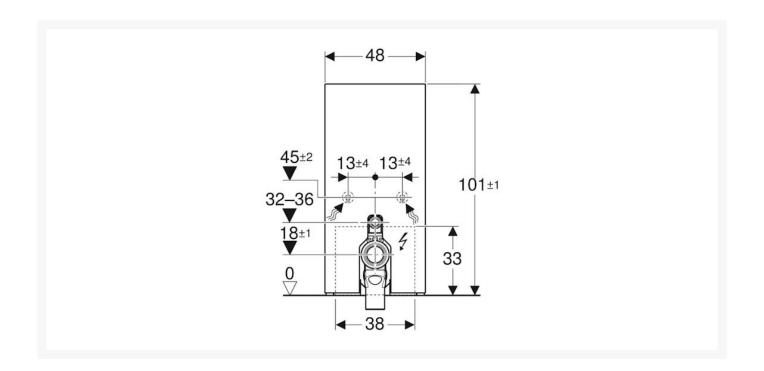

## **Description**

The Geberit Monolith Plus for floor-standing WCs 1010mm, stoneware slate & black chrome. The Plus version of the Geberit monolith conceals a solution for water hygiene from the adjustable interval flush, settings can be programmed only via the Geberit Home app. The odour extraction unit keeps the bathroom fresh.

If no structural bathroom adjustments are needed they can be ready within a few hours.

#### **Key benefits:**

- Ideal for renovations, conversions and new buildings
- Dual flush feature
- Flush interval adjustable
- Soft-touch buttons for flush actuation
- User detection range can be set
- Odour extraction unit with run on-function
- Odour extraction ceramic honeycomb filter can be activated
- Ceramic honey comb filter can be replaced without tools
- · Comfort light
- Light colour can be adjusted from warm white to cool white continuously
- Supports itself
- Compensates dimensional tolerances possible
- Replaces low-level exposed cisterns
- Used for replacing floor-standing WCs with close-coupled exposed cistern
- Used for Geberit AquaClean Tuma WC complete solution, floor-standing WC
- Used for Geberit AquaClean WC Enhancement solutions, with accessories
- Enhancement solution accessory for 1010mm monolith (Product code: 131.102.TA.1)
- Can be mounted on finished floors
- Used for installation in front of dry walls or solid walls
- For floor inlets

• Used for floor-standing WCs with P-bend and water inlet height of 320 – 360mm above the floor (EN 33)

#### **Technical details:**

- Front cladding: Stoneware slate
- Side cladding: Aluminium
- Side cladding colour: Black chrome
- Height (mm): 1010
- Width (mm): 106
- Base (mm): 480
- Protection degree: IPX4
- Protection class: I
- Nominal Voltage: 100 240 V AC
- Operation with extra low voltage
- No mains voltage in cistern
- Mains connection with flexible three-core sheathed cable
- Mains frequency 50 60 Hz
- Operating voltage: 12 V DC
- Power consumption: 15 W
- Standby power consumption: < 0.5
- Flow pressure: 0.1 10 bar
- Max. operating water temperature: 25°C
- Flush volume factory settings: 6 & 3 l
- Large flush volume range: 4 6 l
- Small flush volume: 3 l
- Light colour: 2200 4000 K
- Cistern is fully insulated against condensation
- Water supply connection on the left and right side possible with accessories
- Water supply connection on the bottom
- Wall inlets with inlet height of > 180mm

#### Scope of Delivery:

- Water supply connection set with 2 angle stop valves 1/2"
- Flush bend extension 160mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight Connector made of PE-HD, ø 90 mm
- Adaptor socket made of PE-HD, ø 90 / 110 mm
- Female socket for mains connection
- Power supply unit
- Base cover
- · Fastening material & fastening material for drywall

#### Manufacturer warranty:

• 2 year manufacture warranty

#### Please note:

- Due to the hygiene reasons and the custom nature of this item, this product is non-returnable
- Colour and structure of natural products may vary
- Geberit will extend the warranty by one year provided that it is installed by a registered installation company and if you register the model you have purchased on their website or you send the supplied warranty card within 90 working days of the installation

#### **Geberit Home App:**

The Geberit Home App allows you to control and adjust the Geberit Monolith Plus sanitary module, the app can be used to register your model for a 1 year warranty extension.

- Adjusts device settings
- Users can call up user manuals digitally
- Access service and contact information
- Access care and maintenance information
- Conveniently order consumables
- Perform maintenance using step by step instructions using the app
- Firmware can be updated using the app

### DOWNLOAD NOW





Apple App Store

Google Play Store

# **Additional Information**

Manufacturer  Geberit  Geberit / Monolith Plus  Geberit AquaClean Tuma Comfort Free-standing WC Complete, Geberit AquaClean Tuma Classic Free- standing WC Complete, Geberit AquaClean WC Enhancement Solutions with Accessories, Conversion Set for Geberit AquaClean WC Enhancement
Geberit AquaClean Tuma Comfort Free-standing WC Complete, Geberit AquaClean Tuma Classic Free- Can Be Combined With standing WC Complete, Geberit AquaClean WC Enhancement Solutions with Accessories, Conversion
Complete, Geberit AquaClean Tuma Classic Free- Can Be Combined With standing WC Complete, Geberit AquaClean WC Enhancement Solutions with Accessories, Conversion
Colour Stoneware Slate Look
Frame Size (mm) Frame Height: 1010
Technical Info.  Factory Setting - Small Flush: 3 l, Flush Volume Factor Setting - 6 and 3 l, Flush Volume Large Adjustment Range - 4 / 6 l
Waste Outlet Position Floor
Flush Operation Top Dual Push Button Flush
App Device Settings, Dual Flush, User Detection, Technologies Comfort Light, Soft-touch Buttons, Odour Extraction Unit