


Geberit Monolith Plus for Floor-standing WC, 114 cm, Front: Stoneware Concrete Look, Sides: ALU

£2,957.20 Inc. VAT

Product Code: 131.233.JV.7

Product Images

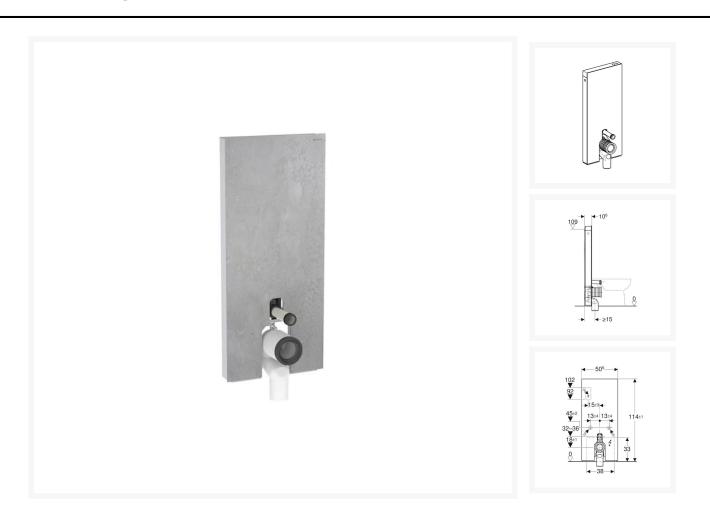



Description

The Geberit Monolith Plus for floor-standing back to wall toilet pans, finished with a Stoneware concrete look Front with Aluminium Side panels, 1140mm overall height. The Plus version of the Geberit monolith conceals the cistern with an adjustable interval flush, settings can be programmed only via the Geberit Home app. The odour extraction unit keeps the bathroom fresh.

A standard installation can often be completed within a few hours.

Key benefits:

- Ideal for renovations, conversions and new buildings
- Dual flush feature
- Flush interval adjustable
- · Soft-touch buttons for flush actuation
- User detection range can be set
- Odour extraction unit with run on-function
- Odour extraction ceramic honeycomb filter can be activated
- Ceramic honey comb filter can be replaced without tools
- Comfort light
- Light colour can be adjusted from warm white to cool white continuously
- Supports itself
- Compensates dimensional tolerances possible
- Replaces low-level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For Geberit AquaClean Tuma WC complete solution, floor-standing WC
- For Geberit AquaClean WC Enhancement solutions, with accessories
- Enhancement solution accessory for 1140mm monolith (Product code: 131.100.TA.1)
- Can be mounted on finished floors
- Used for installation in front of dry walls or solid walls
- For floor inlets

- Used for floor-standing back to wall toilet pans, with a P-bend waste and a water inlet height 320 360mm above the floor (EN 33)
- Settings can only be changed via the Geberit Home App

Technical details:

- Front cladding: Stoneware concrete look
- Side cladding: Aluminium
- Height (mm): 1140
- Width (mm): 106
- Base (mm): 505
- Protection degree: IPX4
- Protection class: I
- Nominal Voltage: 100 240 V AC
- Operation with extra low voltage
- No mains voltage in cistern
- Mains connection with flexible three-core sheathed cable
- Mains frequency 50 60 Hz
- Operating voltage: 12 V DC
- Power consumption: 15 W
- Standby power consumption: < 0.5
- Flow pressure: 0.1 10 bar
- Max. operating water temperature: 25°C
- Flush volume factory settings: 6 & 3 l
- Large flush volume range: 4 6 l
- Small flush volume: 3 l
- Light colour: 2200 4000 K
- Cistern is fully insulated against condensation
- Standard Bottom water supply connection
- Left and right-side water supply connections require accessories please contact us
- Wall inlets with inlet height of > 180mm

Scope of Delivery:

- Water supply connection set with 2 angle stop valves 1/2"
- Flush bend extension 160mm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight Connector made of PE-HD, ø 90 mm
- Adaptor socket made of PE-HD, ø 90 / 110 mm
- Female socket for mains connection
- Power supply unit
- Base cover
- Fastening material & fastening material for drywall

Manufacturer warranty:

• 2 year manufacture warranty

Please note:

- Due to the hygiene reasons and the custom nature of this item, this product is non-returnable
- Colour and structure of natural products may vary
- Geberit will extend the warranty by one year provided that it is installed by a registered installation company and if you register the model you have purchased on their website or you send the supplied

Geberit Home App:

The Geberit Home App allows you to control and adjust the Geberit Monolith Plus sanitary module, the app can be used to register your model for a 1 year warranty extension.

- Adjusts device settings
- Users can call up user manuals digitally
- Access service and contact information
- Access care and maintenance information
- Conveniently order consumables
- Perform maintenance using step by step instructions using the app
- Firmware can be updated using the app
- For your convenience the Geberit App QR codes are displayed below

DOWNLOAD NOW





Apple App Store

Google Play Store

Additional Information

Manufacturer	Geberit
Manufacturer	Gebent
Brand / Model	Geberit / Monolith Plus
Can Be Combined With	Geberit AquaClean Tuma Comfort Free-standing WC Complete, Geberit AquaClean Tuma Classic Free- standing WC Complete, Geberit AquaClean WC Enhancement Solutions with Accessories, Conversion Set for Geberit AquaClean WC Enhancement
Colour	Stoneware Concrete Look
Frame Size (mm)	Frame Height: 1140
Technical Info.	Factory Setting - Small Flush: 3 l, Flush Volume Factory Setting - 6 and 3 l, Flush Volume Large Adjustment Range - 4 / 6 l
Waste Outlet Position	Floor
Flush Operation	Top Dual Push Button Flush
Technologies	App Device Settings, Dual Flush, User Detection, Comfort Light, Soft-touch Buttons, Odour Extraction Unit