





Independent 4 Life


# P12 Pump Kit B w/ USG1 Gully for Floor Formers (with 1x Flow Switch)

£430.06 Inc. VAT

Product Code: 05PP01B

## Product Images



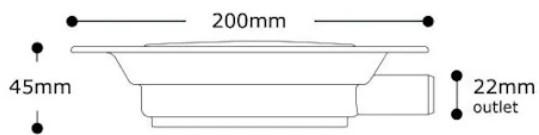

#### TYPICAL ELECTRIC SHOWER INSTALLATION





## Additional Options

Product Code / Optional Extra Flow Switch and Covers	05PP11 / Additional Flow Switch the Hot Feed of a Mixer Shower	£44.35
	05PP16 / Control Box Cover	£14.52
	05PP17 / Flow Switch Cover x1	£9.36
	05PP17x2 / Flow Switch Cover x2	£18.72

## Description

The P12 shower waste water pump is designed for use when gravity drainage is unavailable.

Quiet and maintenance-free, this pump will easily cope with hair, shower gels and small obstructions that would normally cause a blockage.

This version of the P12 is supplied with a USG1 white pumped waste for use with wet room floor formers with vinyl flooring and can be used with any electric or mixer shower which will require an extra Flow Switch.

**Key benefits:**

- Peristaltic pump design
- Near silent operation
- Safe 24v DC low energy motor, with low running costs
- Control box with built in test facility
- ABS Wall plate with quick release pump bracket, minimises installation time

- Supplied with a 2 metre length of 22mm flexible pipe for improved performance
- Wastewater is pumped through a sealed tube reducing the risk of blockages
- Self-priming up to 500mm
- Pumps up to 12 litres per minute
- Variable speed transformer for precise control
- Easily adjustable run-on timer
- Match the speed of pump to flow of water
- Maintenance free design
- Not handed for easy and quick installation
- Supplied with push fit pump housing cover
- Manufactured in the UK from parts that are 100% recyclable

#### **Includes McAlpine USG1 pumped waste:**

- Easy to clean waste trap for wet room floor formers
- Suitable for vinyl flooring
- Manufactured in white ABS - withstands wheelchair loading
- 200mm overall diameter
- 45mm in depth
- 22mm outlet, with increased length for ease of installation

#### **Floor former compatibility:**

- Compatible with floor formers with a 200mm overall dia. waste hole outlet
- For optimum performance of 12 litres per minute, Contour recommend the pump is installed no higher than 350mm from the top of the waste outlet to the underside of the wall plate
- The pump can be installed up to a maximum of 500mm but this will reduce the pump's overall performance
- The maximum length of the flexible pipe from the waste to the pump should be no more than 2m
- Can be retrofitted and is compatible with all wastes with a 22mm outlet
- If you want to use larger outlet pipework a suitable 22 - 40mm connector can be used
- Install so that the outlet side of the pump is slightly higher than the soil pipe connection, this will ensure a clean flow away from the pump, and help to keep the pipework clear

#### **Shower compatibility:**

- Suitable for electric showers - includes 1x Flow Switch which should be installed in the cold water supply
- Suitable for mixer showers - select if an additional Flow Switch (Product Code: 05PP11) for the hot water supply
- If you are installing a Redring Selectronic Premier WP, Mira Advance ATL Flex Extra or the Triton Safeguard+. order alternative 'Link' Pump Kit B (Product Code: 05PP01B-L)
- When linking directly with a Mira Advance Flex Extra or Redring Selectronic Premier WP, Re-tighten the gland and connect the electric shower cables to the terminals marked flowswitch
- See installation instructions in the "Installation and Help Guides tab" for more information

#### **Optional covers:**

- Control Box Cover (Product Code: 05PP16)
- 1x Flow Switch Cover (Product Code: 05PP17)
- 2x Flow Switch Cover (Product Code: 05PP17x2)

#### **Technical details:**

- Actual pump size (mm): 205 W x 270 H x 180 D
- Pump housing cover size (mm): 210 W x 330 H x 190 D

[www.independent4life.co.uk](http://www.independent4life.co.uk) | [info@independent4life.co.uk](mailto:info@independent4life.co.uk) | Tel: 0800 500 3001 | VAT No: 942447711

EORI GB942447711000

- Power Consumption 36 Watts intermittent rating
- 2.5 amp Fast blow fuse
- IP65 Enclosure for bathrooms
- Pump complies to BS7671

**Warranty:**

- 7 year manufacturer warranty (based upon correct installation and appropriate application)

**Additional Information**

---

Manufacturer	AKW / Contour
Application	Vinyl Sheet Safety Flooring, Floor Former