




Independent 4 Life

P12 Pump Kit D w/ UPSW-4-22 Trap for Shower Trays (No Flow Switch)

£424.18 Inc. VAT


Product Code: 05PP01D-L

Product Images





Pump Housing Dimensions

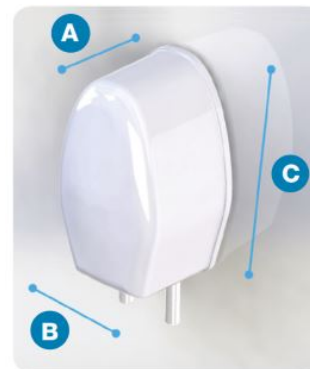

A = 190mm
B = 210mm
C = 330mm

The housing clips onto the wall plate.

Manufactured from ABS.



TYPICAL ELECTRIC SHOWER INSTALLATION



Additional Options

Product Code / Optional Cover

05PP16 / Control Box Cover

£14.52

Description

The P12 shower waste water pump is designed for use when gravity drainage is unavailable.

Quiet and maintenance-free, this pump will easily cope with hair, shower gels and small obstructions that

would normally cause a blockage.

This version of the P12 is supplied with a McAlpine UPSW-4 Pumped Shower Tray Waste for trays with 89.50mm diameter waste outlet hole.

The 'Link' feature enables the pump to connect directly to an AKW, Redring Selectronic Premier WP, Mira Advance ATL Flex Extra or the Triton Safeguard+ eliminating the need for a flow switch.

Key benefits:

- Peristaltic pump design
- Near silent operation
- Safe 24v DC low energy motor, with low running costs
- Control box with built in test facility
- ABS Wall plate with quick release pump bracket, minimises installation time
- Supplied with a 2 metre length of 22mm flexible pipe for improved performance
- Wastewater is pumped through a sealed tube reducing the risk of blockages
- Self-priming
- Pumps up to 12 litres per minute
- Variable speed transformer for precise control
- Easily adjustable run-on timer
- Match the speed of pump to flow of water
- Maintenance free design
- Not handed for easy and quick installation
- Supplied with push fit pump housing cover
- Manufactured in the UK from parts that are 100% recyclable

Includes a McAlpine UPSW-4 pumped waste:

- Top access, easy to clean shower tray waste
- Suits 89.50mm diameter waste outlet in shower tray
- 30mm depth, 22mm outlet
- 113mm chrome plated, brass flange and petal grid fitting

Shower tray compatibility:

- Also compatible with other shower trays with a 89.50mm diameter waste outlet - please refer to waste dimensions image for guidance
- For optimum performance of 12 litres per minute, Contour recommend the pump is installed no higher than 350mm from the top of the waste outlet to the underside of the wall plate
- The pump can be installed up to a maximum of 500mm but this will reduce the pump's overall performance
- The maximum length of the flexible pipe from the waste to the pump should be no more than 2m
- Can be retrofitted and is compatible with all wastes with a 22mm outlet
- If you want to use larger outlet pipework a suitable 22 - 40mm connector can be used
- Install so that the outlet side of the pump is slightly higher than the soil pipe connection, this will ensure a clean flow away from the pump, and help to keep the pipework clear

Shower compatibility:

- No Flow Switch is supplied with this kit
- Link directly to an AKW, Redring Selectronic Premier WP, Mira Advance ATL Flex Extra or the Triton Safeguard+ eliminating the need for a flow switch
- When linking directly with a Mira Advance Flex Extra or Redring Selectronic Premier WP, Re-tighten the gland and connect the electric shower cables to the terminals marked flowswitch
- See installation instructions in the "Installation and Help Guides tab" for more information

www.independent4life.co.uk | info@independent4life.co.uk | Tel: 0800 500 3001 | VAT No: 942447711

EORI GB942447711000

Optional cover:

- Control Box Cover (Product Code: 05PP16)

Technical details:

- Actual pump size (mm): 205 W x 270 H x 180 D
- Pump housing cover size (mm): 210 W x 330 H x 190 D
- Power Consumption 36 Watts intermittent rating
- 2.5 amp Fast blow fuse
- IP65 Enclosure for bathrooms
- Pump complies to BS7671

Warranty:

- 7 year manufacturer warranty (based upon correct installation and appropriate application)

Additional Information

Manufacturer	AKW / Contour
Application	Shower Tray