





Independent 4 Life



# Mira Advance ATL Flex Electric Shower - 8.7kW

£397.20 Inc. VAT

Product Code: 1.1785.003

## Product Images



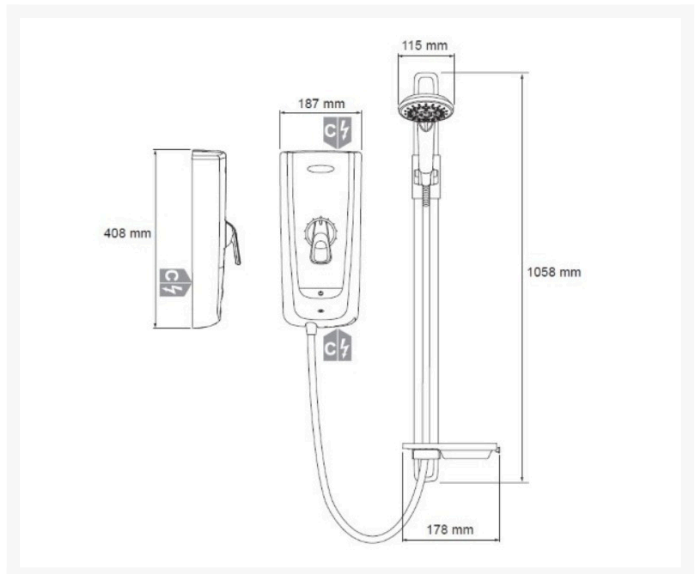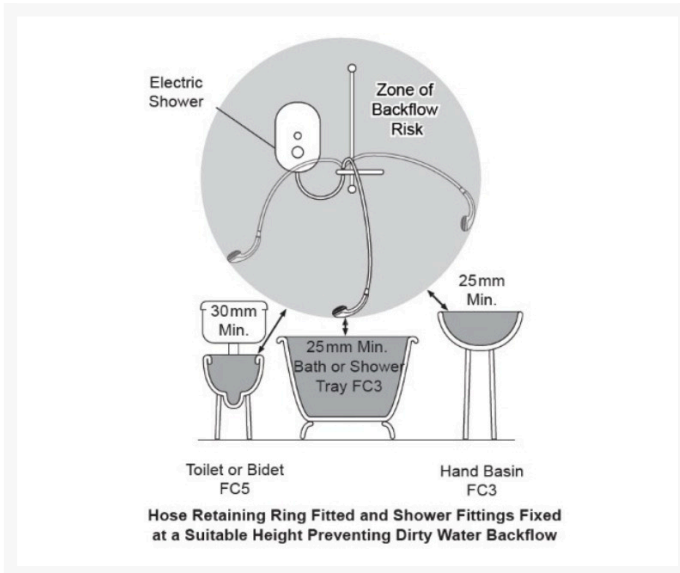

## Description

The new Mira Advance ATL Flex is the ultimate shower for safety and usability.

### Key benefits:

- Electronic thermostatic Temperature Control
- Factory set to safe max. temp settings 41-48 deg. C
- Phased shutdown flushes hot water from the tank to make it safer for the next user
- Mira Clearscale™ Pro technology, included as standard, reduces the build-up of limescale by up to 50%
- Easily accessible controls, with high contrast on critical touch points
- Audible and tactical features for the visually impaired user
- - Audible beeps when turning on / off and when the desired temperature is reached
- - Audible clicks when turning the temperature dial
- Four different maximum temperature settings
- Anti-glare matte finish panel
- 1000mm riser rail with 2000mm flexible hose

[www.independent4life.co.uk](http://www.independent4life.co.uk) | [info@independent4life.co.uk](mailto:info@independent4life.co.uk) | Tel: 0800 500 3001 | VAT No: 942447711

EORI GB942447711000

- 110mm dia. showerhead with 3 spray modes (Coverage, Soft and Task) with rub clean nozzles
- Extra-long easy to use slide bar with friction grip showerhead holder
- Hose retaining ring (view - The Water Backflow image in image gallery for more information)
- Soap Dish
- Designed and manufactured in the UK

#### **Technical details:**

- Hose length (mm): 2000
- Riser rail (mm): 1000
- Output (kW): 8.7
- Supply Voltage 230v + 10%
- Supply rating: 40 amp
- Terminal block connections: Max. 16mm<sup>2</sup>
- Cable entry points: Right (Rising, falling or rear)
- Supply: Mains pressure cold water feed
- Water entry points: Right (Rising, falling or rear with an elbow)
- Inlet connections: 15mm compression
- Outlet connection: ½" BSP male
- Minimum maintained pressure: 0.5 bar (5 meter head), (1.0 bar BEAB Care)
- Maximum maintained pressure: 5.0 bar (50 meter head)
- Maximum static pressure: 10.0 bar (100 meter head)

#### **Approvals:**

- WRAS Approved
- KIWA UK Approved
- BEAD Care Approved
- BEAD Approved
- RNIB Approved Gold awarded

#### **Manufacturer warranty:**

- 2-year - Shower
- 1-year - Fittings

#### **Note:**

- The Mira Advance Flex replaces the Mira Advance ATL Flex 9.0kw (Product code: 1.1643.005) which has been discontinued

## Additional Information

---

Manufacturer	Mira
Shower Type	Electric
Shower Features	Shower Control, Adjustable Riser Rail, Flexible Hose and Handset
Fixings	Exposed
Control	Manual Lever, Manual Dial, Push Button
Hose Length (mm) / Application	2000 / Shower Hose
Water Pressure	Normal Mains
Technologies	Thermostatic Control, Phased Shutdown
Approvals	BEAB Care Mark, BEAB Approved, RNIB Mark, WRAS Approved, Kiwa Approved