

Product Overview

This pack includes everything needed to assemble a fully compliant washroom. It features a close-coupled WC with lever flush and 750mm projection, a finger rinse wash basin with thermostatic mixer tap, and a selection of grab rails able to support up to 30st (200kg).

Pack Specification

- + Navlin Doc M raised-height, rimless toilet pan with 750mm projection
- + Water-saving, close-coupled cistern with lever flush and screw-down lid
- Ergonomic toilet seat with lid, soft-close hinges and seat lugs (available in blue, white, dark blue or mid-grey)
- + Navlin Doc M finger rinse 400mm wash basin with two tap holes
- + TMV3 WRAS approved thermostatic mixer tap
- + 600mm straight grab rails with either an epoxy resin coating (available in white, dark-blue or mid-grey) or fluted uPVC finish (choose from blue, white, dark blue or mid-grey) x 4
- + 450mm straight grab rail with an epoxy resin coating (available in white, dark blue or mid-grey) or fluted uPVC finish (choose from blue, white, dark blue or mid-grey)
- + Fold-up rail with adjustable leg and optional toilet roll holder, finished with an epoxy resin coating (available in blue, white, dark blue or mid-grey), and treated with a rust inhibitor



Guarantees & Approvals

- + WC conforms to BS EN 997 and current UK Water Supply (Water Fittings) Regulations
- + Wash basin conforms to BS EN 14688
- + AKW are self-certifying and supplying approved flush fittings in line with current UK water regulations for compliance purposes
- + WRAS approved cistern fittings



Sanitaryware (ceramic), toilet seats, brassware & grab rails



Flush fittings & fold-up rails



& brassware







Features & Benefits

- + Rimless toilet pan offers improved hygiene levels by reducing the build-up of bacteria and making cleaning easier
- 480mm raised-height toilet pan (height with seat affixed) complies with Doc M guidelines, with extended 750mm projection to aid with side transfer
- Ergonomic toilet seat (with lid) is shaped for comfort and easy cleaning, comes with seat lugs for stability when side transferring, and soft-close hinges for safety
- Lever flush cistern can be easily operated by hand, closed fist, or elbow, ideal for those with limited dexterity, with a screw-down lid for added security and safety in public facilities
- + 3/6 litre flush options increase performance and water efficiency
- + Two tap hole finger rinse wash basin for flexibility when installing blanking plug supplied

- + TMV3 approved thermostatic mixer tap with lever handle prevents scalding
- + uPVC fluted grab rails offer superb grip even when wet and support loads of up to 15.5st (100kg)
- + Stainless-steel grab rails benefit from an durable coating and support loads of up to 23.5st (150kg)
- + Fold-up rail available in multiple colours to offer high contrast, supports loads of up to 30st (200kg), features an adjustable leg and optional toilet roll holder, is finished with an epoxy resin coating and treated with a rust inhibitor for longevity
- + Components individually packaged in recyclable materials to prevent damage during transit

Product Codes

Pack 5 Close-Coupled Std Doc M Pack with TMV3 Mixer Tap

Fluted Blue	28314FBU
Fluted White	28314FWH
Fluted Dark Blue	28314FDB
Fluted Mid-Grey	28314FMG
Stainless White	28314SWH
Stainless Dark Blue	28314SDB
Stainless Mid-Grey	28314SMG





Related Products

Pack 2 Fully Compliant Low-Level Doc M Pack - Fluted Blue 28311F Pack 3 Close-Coupled Std Doc M Pack Fluted Blue 28312F Fluted White 28312F Fluted Dark Blue 28312F Fluted Mid-Grey 28312F Stainless White 28312SV Stainless Dark Blue 28312SV Stainless Mid-Grey 28312SV Stainless Mid-Grey 28312SV Stainless Mid-Grey 28312SV
Fluted Blue 28312F Fluted White 28312FV Fluted Dark Blue 28312F Fluted Mid-Grey 28312FN Stainless White 28312SV Stainless Dark Blue 28312SV Stainless Mid-Grey 28312SN
Fluted White Fluted Dark Blue 28312FV Fluted Mid-Grey 28312FN Stainless White 28312SV Stainless Dark Blue 28312SV Stainless Mid-Grey 28312SN
Fluted Dark Blue 28312F Fluted Mid-Grey 28312FN Stainless White 28312SN Stainless Dark Blue 28312SN Stainless Mid-Grey 28312SN
Fluted Mid-Grey Stainless White Stainless Dark Blue Stainless Mid-Grey 2831250 2831250 2831250
Stainless White 28312SV Stainless Dark Blue 28312S Stainless Mid-Grey 28312SN
Stainless Dark Blue 28312S Stainless Mid-Grey 28312SN
Stainless Mid-Grey 28312SN
<u> </u>
Pack 4 Low-Level Std Doc M Pack
Fluted Blue 28313F
Fluted White 28313FV
Pack 6 Low-Level Std Doc M Pack with TMV3 Mixer Tap
Fluted Blue 28315F
Fluted White 28315FV
Pack 7 Close-Coupled Contemporary Doc M Pack – Stainless Steel 28319
Pack 8 Low-Level Contemporary Doc M Pack – Stainless Steel 28316
Pack 9 Close-Coupled Peninsular Doc M Pack
Fluted Blue 28317F
Fluted White 28317FV
Pack 10 Close-Coupled Ambulant Doc M Pack
Fluted Blue 28318F
Fluted White 28318FV



Dimensions

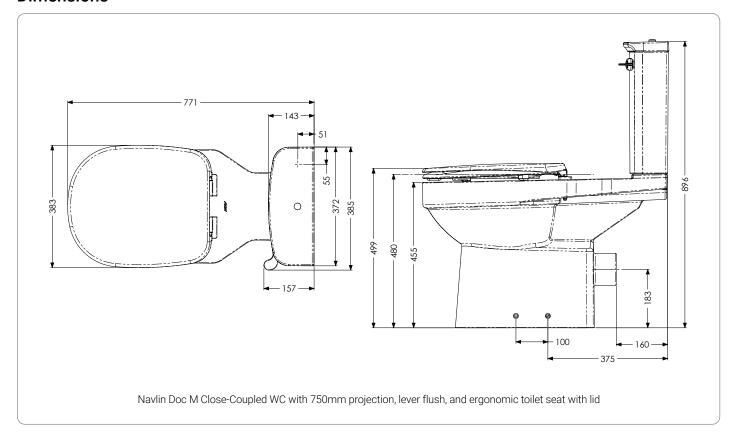

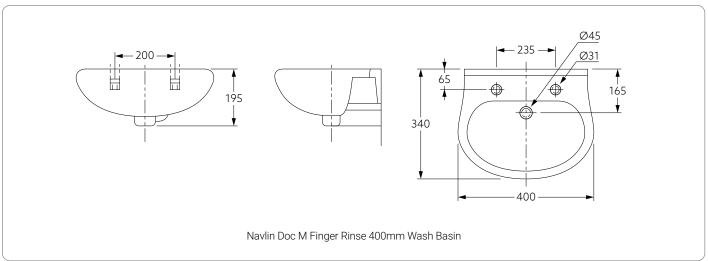


Order: 01905 823 299 | orders@akw-ltd.co.uk Technical support: 01905 560 219



Doc M Installation - Plan View

Doc M compliancy is dependent on the design of the space and placement of the products. This means that although you may have purchased a Doc M sanitaryware pack most relevant for the environment and user needs, unless this is installed correctly and follows guidance issued within Doc M Building Regulations, your washroom will **not** be fully compliant.


The below drawing illustrates how to correctly install this pack to create a compliant Doc M washroom.

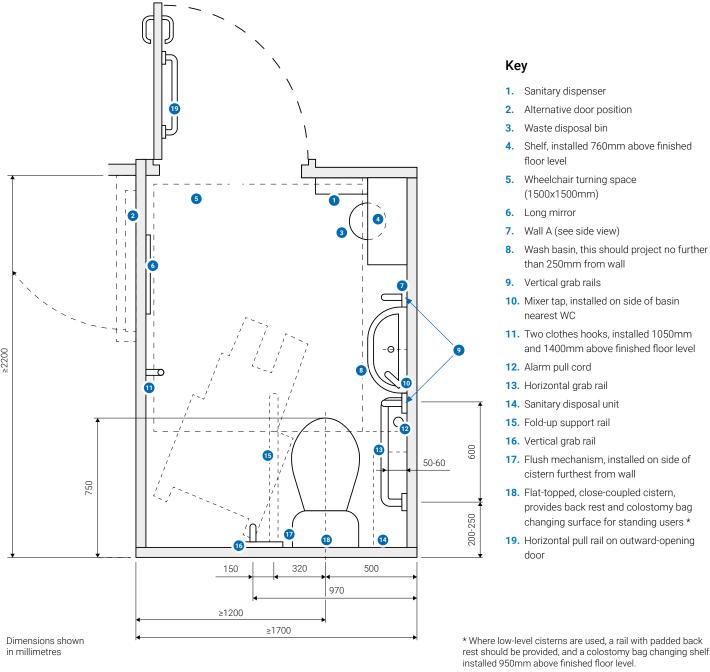

Technical support: 01905 560 219



Doc M Installation - Side View

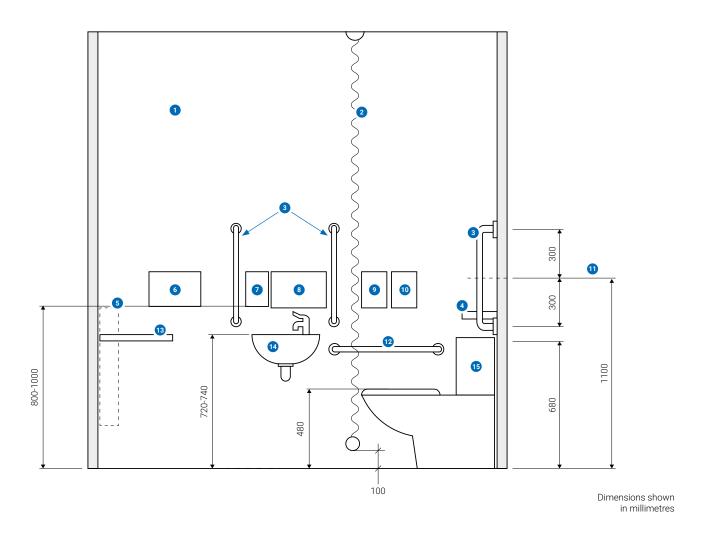

Key

- 1. Wall A (see plan view)
- 2. Alarm pull cord with two red bangles
- Vertical grab rails installed above wash basin 500-700mm apart with basin positioned centrally below
- Colostomy bag changing shelf, installed 950mm above finished floor level *
- Sanitary dispenser, installed on wall adjacent to door, with coin slot positioned 750-1000mm above finished floor level
- 6. Automatic hand dryer
- 7. Soap dispenser

- 8. Paper towel dispenser
- Toilet tissue dispenser
- 10. Alarm reset button
- 11. Centre of vertical grab rails should be 1100mm
- 12. Horizontal grab rail
- 13. Shelf, installed 760mm above finished floor level
- 14. Wash basin, mixer tap installed on side of basin nearest WC
- 15. Flat-topped, close-coupled cistern, provides back rest and colostomy bag changing surface for standing users *

NOTE: Examples shown are for right-handed transfer to WC.

^{*} Where low-level cisterns are used, a rail with padded back rest should be provided, and a colostomy bag changing shelf, installed 950mm above finished floor level.