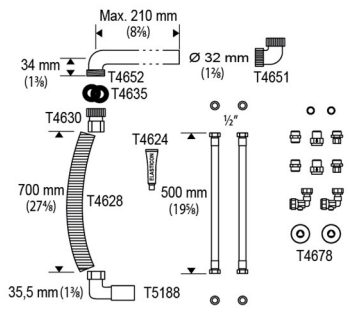


<b>Product</b>	Flexible feed and waste system 500/700 mm	
<b>Item number</b>	R2071 EAN:5708590147901 NBS:N13:30,335	
<b>Product description</b>	Flexible feed/waste system for the UK. Feed pipes: 500 mm, waste pipe: 700 mm. Feed pipe, metal braid, with 1/2" coupling. Flexible waste pipe, dia. 32 mm.	 <p>Technical drawing showing components and dimensions: Max. 210 mm (8%), 34 mm (1%), T4652, T4635, T4651, T4630, T4628, 700 mm (27%), 500 mm (19%), T4624, 1/2", T4678, 35,5 mm (1%), T5188.</p>
<b>Materials</b>	<p>The feed pipes are made from SPX plastic, braided with stainless steel. The connecting nuts are 1/2" in both ends and made from brass. The waste pipe is flexible, corrugated white PVC with a diameter of 32 mm, and comes with an adaptor to fit 40 mm. We do not recommend flushing the waste hose with formaldehyde. The elbow with removable connector is made from PP (polypropylene) with a seal of TPE (thermoplastic elastomer). Maximum temperatures of use are 80°C (continuous use) and 90°C (temporary use). PP is very resistant to water, damp and most organic solvents. The seal is made from EPDM – Temperature of use from -50°C - +120°C/150°C EPDM is particularly resistant to ozone and weather. Good resistance to heat and cold and to most chemicals – but poor resistance to petroleum products and solvents.</p>	
<b>Ergonomy</b>	<p>The flexible feed and waste systems are needed to ensure the flow of water to and from the height adjustable wash basin brackets. To maximize product flexibility, it is important that the plumbing installation are correctly positioned and do not obstruct movement. The waste hose can be shortened on site to fit the installation.</p>	
<b>Cleaning</b>	<p>When cleaning the wash basin, it is recommended that one flush the waste hose through with 50-60 degrees hot water in order to prevent build-up of soap residues inside the hose. Ensure that the hose is stretched out during this flushing.</p>	