


Pressalit 500mm Flexible Feeds & 700mm Flexible Waste System - Basin Lifts

£263.94 Inc. VAT


Product Code: R2071


Product Images









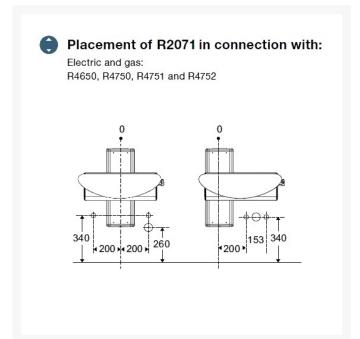



Description

Pressalit 500mm flexible hot and cold feeds with a 700mm flexible waste pipe for use with the Pressalit height adjustable washbasin lifts.

The flexible feed and waste systems are needed to allow adjustment of the wash basin and shower mixer.

To maximise product flexibility, it is important that the plumbing connections are correctly positioned and do not obstruct movement.

These flexible feed and waste systems can be further supplemented with the water trap R2058 and air relief kit R2059.

Key benefits:

- Flexible feeds / waste system for the UK
- 500mm flexible hot and cold feeds, braided stainless steel hoses with 1/2" brass couplings at either end
- 2x right-angled isolating valves for connecting to the water supply
- Ø 32mm x 210mm overall length, waste pipe elbow (can be cut to length)
- Supplied female inlet nut with 1¼" to 32mm ISO Thread basin waste outlet connector
- 700mm flexible 32mm waste pipe with adaptor to fit to 40mm compression coupling
- Note: The 40mm waste connection will fit UK plumbing with the aid of a compression fitting (not included)
- Maximum temperatures of use are 80°C (continuous use) and 90°C (temporary use)
- WRAS approved

Materials:

- Feed pipes: SPX plastic, braided with stainless steel
- Waste pipe: Flexible, corrugated white PVC with a diameter of 32mm, supplied 40mm adaptor
- Elbow with removable connector: PP (polypropylene) with a seal of TPE (thermoplastic elastomer)
- Seal: The seal is made from EPDM

Warranty:

• 5 year manufacturer warranty

Please note:

- Pressalit recommend fitting the waste wall connection and isolating valves on the feed connections at 90° angles, pointing downwards
- Avoid the use of petroleum products and solvents with this waste kit

Additional Information

Manufacturer	Pressalit
Component	Flexible Feeds, Flexible Waste, Waste Kit - Wash Basin
Hose Length (mm) / Application	500 & 700 / Feeds & Waste
Technologies	Isolating Valves
Approvals	WRAS Approved