




Independent 4 Life

Ropox A-400 SS Inset Shallow Bowl Insulated Sink - Overall Size 460x400 - 135mm Depth

£427.50 Inc. VAT

Product Code: 30-45007

Product Images






ROPOX
Better ways to better days




ROPOX
Better ways to better days

1901019

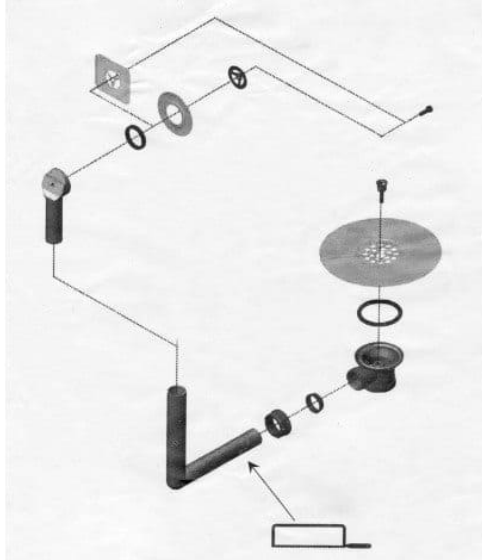

ROPOX
Better ways to better days

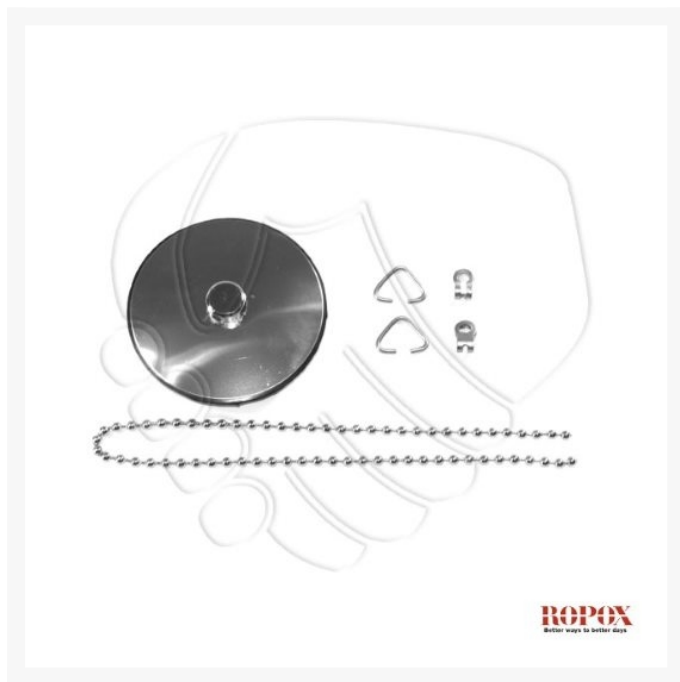

Description

135mm depth Ropox shallow bowl kitchen sink, supplied with a separate self-adhesive insulation pad for the underside of the sink, to prevent scalding and burns.

The insulated underside makes the sink suitable for installation in a height adjustable work surface, preventing scalding when used by wheelchair or seated users.

This version of the Ropox sink has a depth of 135mm - a 100mm deep version is also available (Product Code: 30-45008).

Key benefits:

- 135mm deep inset shallow bowl kitchen sink
- Heat resistant at very high temperatures
- Heat insulation pad supplied loose for site fitting if required
- Stainless steel (AISI 304), chrome and nickel
- 100% recyclable material
- Polished surfaces that are easy to clean, hygienic
- Slotted sink waste and overflow pipe included
- Suitable for installation in height adjustable worktops
- Suitable for domestic and commercial installations
- Plug and chain set included

Technical details:

- For inset installation
- Unhanded
- Outside dimensions (mm): 460 x 400
- Bowl size (mm): 400 x 340
- Bowl depth (mm): 135
- Cut out size (mm): 430 x 370

- Radius in the corners (mm): R95
- Material thickness (mm): 0.8
- Material: Stainless steel EN 1.4301, AISI 304, SS2333
- Quality stainless steel, that is very resistant towards stains, rust and corrosion
- Matt finish

Maintenance:

- Discoloration on the stainless steel is typical caused by extreme “attacks” on the surface and not from the steel itself
- If the spots cannot be removed with regular cleaning, they can be easily removed with a soft scouring sponge
- Note - Never use a steel wool sponge

Warranty:

- 1 year manufacturer warranty

Please note:

- The sink bowl does not have a tap hole, worktop mounted taps will be required (please order separately).
- If used with a height adjustable worktop lift, a 40mm Flexible Plumbing Kit will be required (please order separately).

Additional Information

Manufacturer	Ropox
For Cabinet Size (mm)	500
Heat Insulated	Yes - Supplied (Self Fit)
Bowl Depth (mm)	135
Sink Installation	Inset