



Independent 4 Life

P12 Pump Link with Push Fit Fittings (No Flow Switch)


£405.40 Inc. VAT

Product Code: 05PP01-L

Product Images



Pump Housing Dimensions

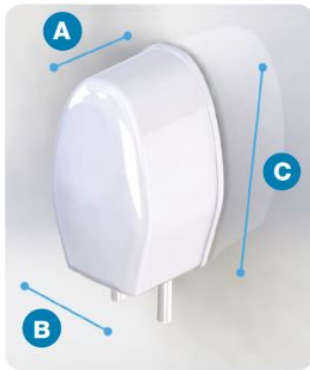

A = 190mm
B = 210mm
C = 330mm

The housing clips onto the wall plate.

Manufactured from ABS.

TYPICAL ELECTRIC SHOWER INSTALLATION



- | | |
|----|--------------------------------------|
| 2. | Electric shower |
| 3. | Waste outlet |
| 4. | 22mm flexible pipework to pump inlet |
| 5. | 22mm flexible pipework to outlet |
| 6. | Contour P12 pump & housing |
| 7. | To mains supply 230V |
| 8. | Control box |

Additional Options

Product Code / Optional Cover

05PP16 / Control Box Cover

£14.52

Description

This version of the P12 Pump Link has push fit fittings only and no shower tray or wet floor waste.

The 'Link' feature enables the pump to connect directly to a AKW, Redring Selectronic Premier WP, Mira Advance ATL Flex Extra or the Triton Safeguard+ eliminating the need for a flow switch

Quiet and maintenance-free, this pump will easily cope with hair, shower gels and small obstructions that would normally cause a blockage.

Key benefits:

- Peristaltic pump design
- Near silent operation
- Safe 24v DC low energy motor, with low running costs
- Control box with built in test facility
- ABS Wall plate with quick release pump bracket, minimises installation time
- Supplied with a 2 metre length of 22mm flexible pipe for improved performance
- Wastewater is pumped through a sealed tube reducing the risk of blockages
- Self-priming up to 500mm
- Pumps up to 12 litres per minute
- Variable speed transformer for precise control
- Easily adjustable run-on timer
- Match the speed of pump to flow of water

- Supplied with push fit pump housing cover
- Maintenance free design
- Not handed for easy and quick installation
- Manufactured in the UK from parts that are 100% recyclable

Shower compatibility:

- No Flow Switch is supplied with this kit
- Link directly to a AKW, Redring Selectronic Premier WP, Mira Advance ATL Flex Extra or the Triton Safeguard+ eliminating the need for a flow switch
- If installing with a different shower - order (Product Code: 05PP01)
- See installation instructions in the "Installation and Help Guides tab" for more information

Waste compatibility:

- P12 Pump with push fit fittings
- The pump should be fitted no higher than 350mm from the tray outlet to the underside of the P12 wall plate
- The maximum length of the flexible pipe from the waste to the pump should be no more than 2m
- Can be retrofitted and is compatible with all wastes with a 22mm outlet
- A shower waste is not included

Optional cover:

- Control Box Cover (Product Code: 05PP16)

Technical details:

- Actual pump size (mm): 205 W x 270 H x 180 D
- Pump housing cover size (mm): 210 W x 330 H x 190 D
- Power Consumption 36 Watts intermittent rating
- 2.5 amp Fast blow fuse
- IP65 Enclosure for bathrooms
- Pump complies to BS7671

Warranty:

- 7 year manufacturer warranty (based upon correct installation and appropriate application)

Additional Information

Manufacturer	AKW / Contour
Application	Shower Tray, Floor Former, Screeded Floors